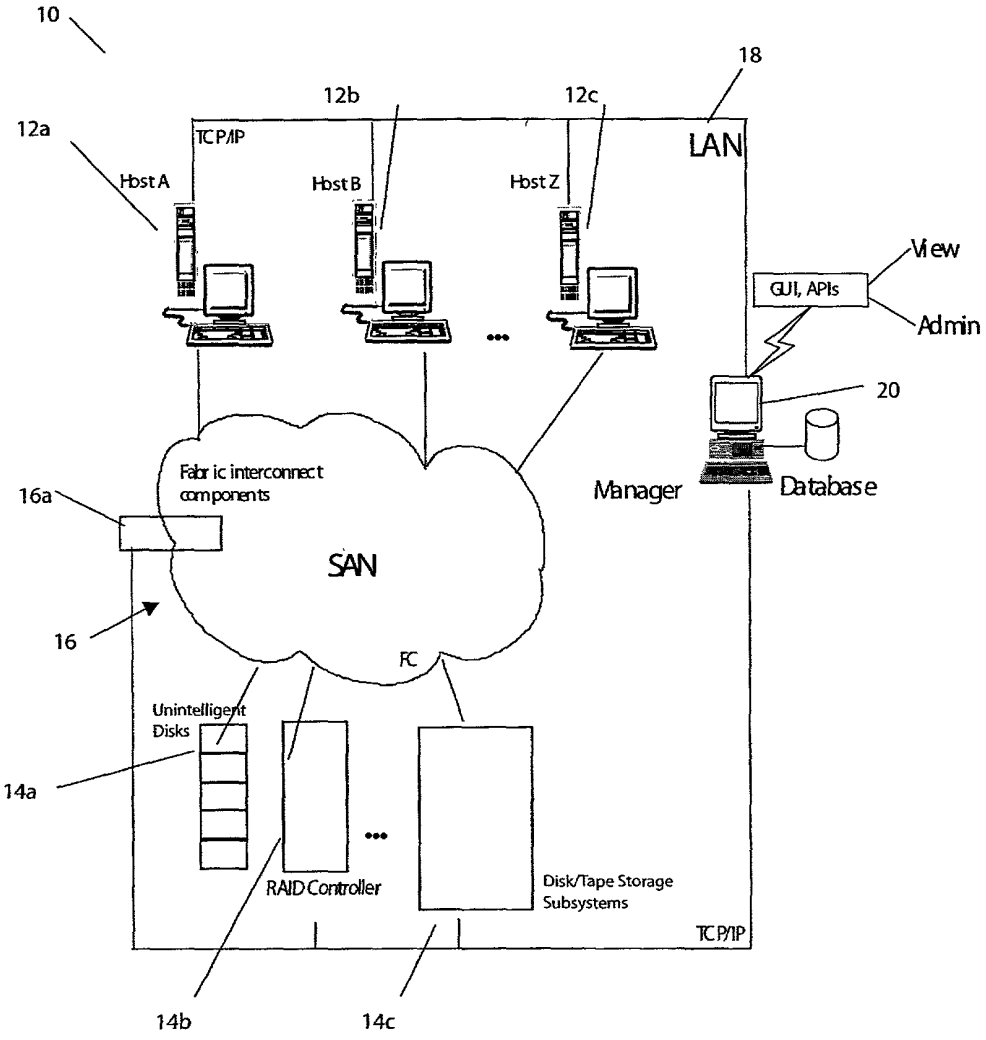
10
18
12b
12c
12a
TCP/IP
LAN
Host A
Host B
Host Z
View
GUI, APIs
Admin
20
Fabric interconnect components
Manager
Database
16a
SAN
16
FC
Unintelligent Disks
14a
RAID Controller
Disk/Tape Storage Subsystems
TCP/IP
14b
14c

Figure 1

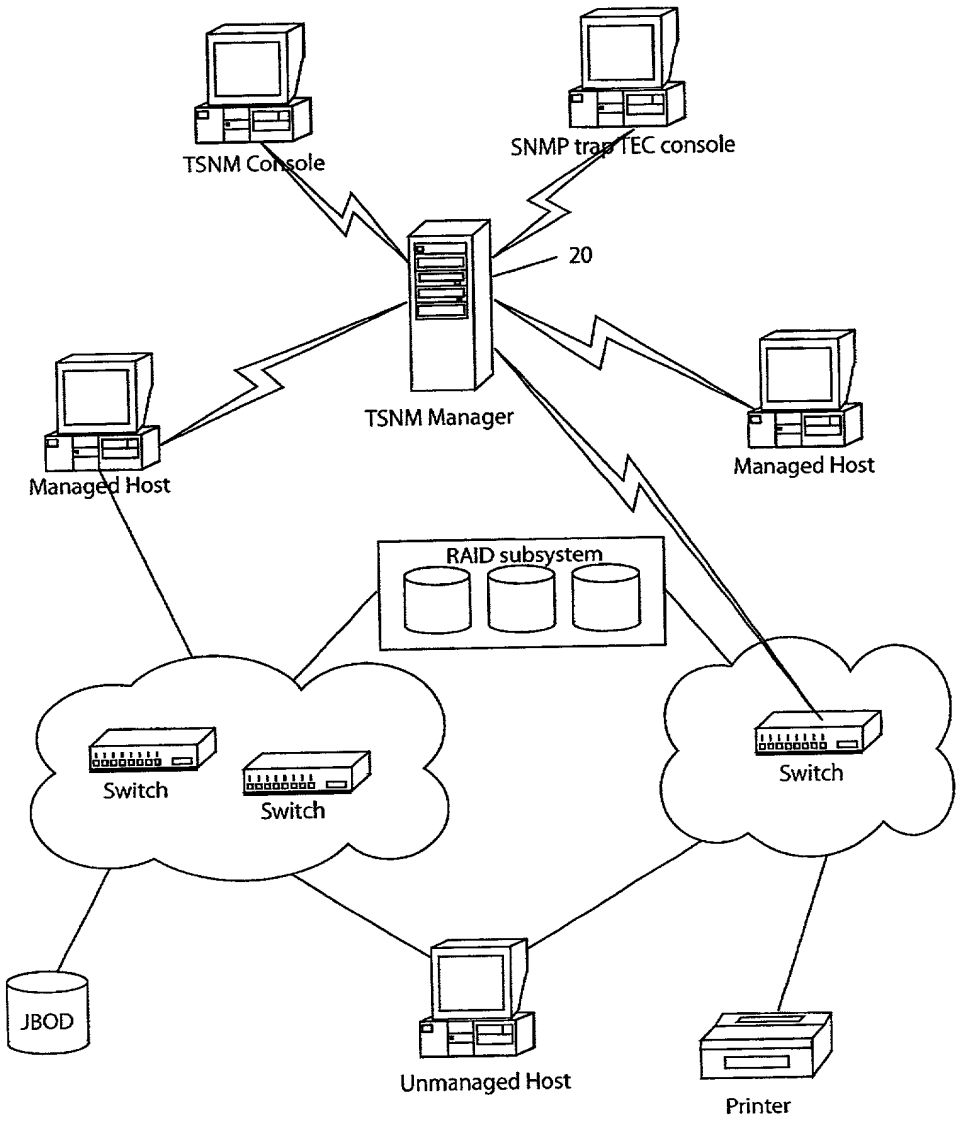
TSNM Console
SNMP trap TEC console
20
TSNM Manager
Managed Host
Managed Host
RAID subsystem
Switch
Switch
Switch
JBOD
Unmanaged Host
Printer

Figure 2

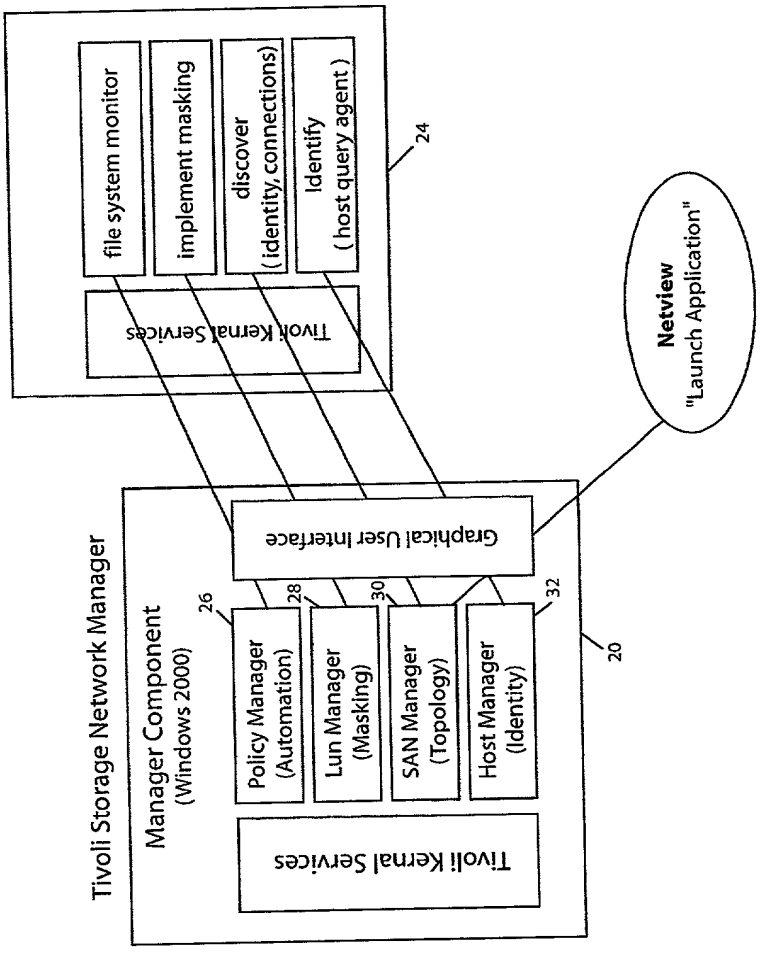
file system monitor
implement masking
discover
(identity, connections)
Identify
(host query agent)
Tivoli Kernal Services
24
Netview
"Launch Application"
Tivoli Storage Network Manager
Manager Component
(Windows 2000)
Graphical User Interface
26
28
30
32
Policy Manager
(Automation)
Lun Manager
(Masking)
SAN Manager
(Topology)
Host Manager
(Identity)
Tivoli Kernal Services
20

Figure 3

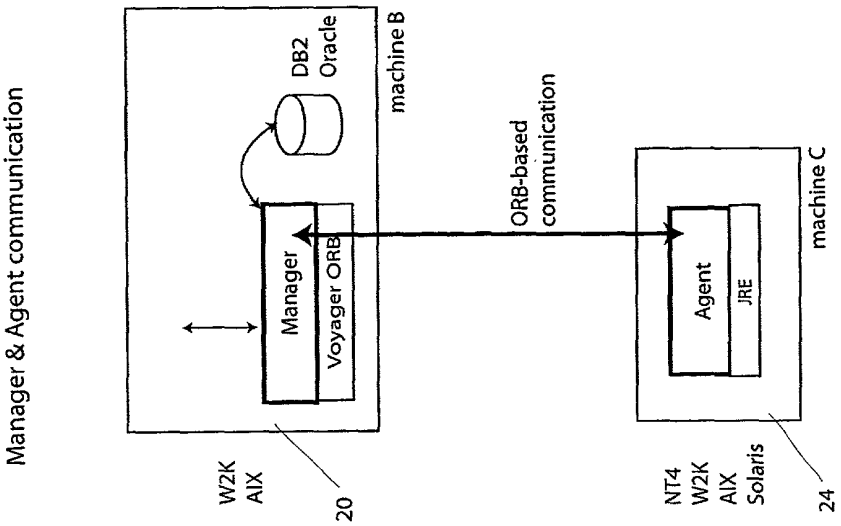
Manager & Agent communication
machine B
DB2
Oracle
Manager
Voyager ORB
W2K
AIX
20
ORB-based
communication
machine C
Agent
JRE
NT4
W2K
AIX
Solaris
24

Figure 4

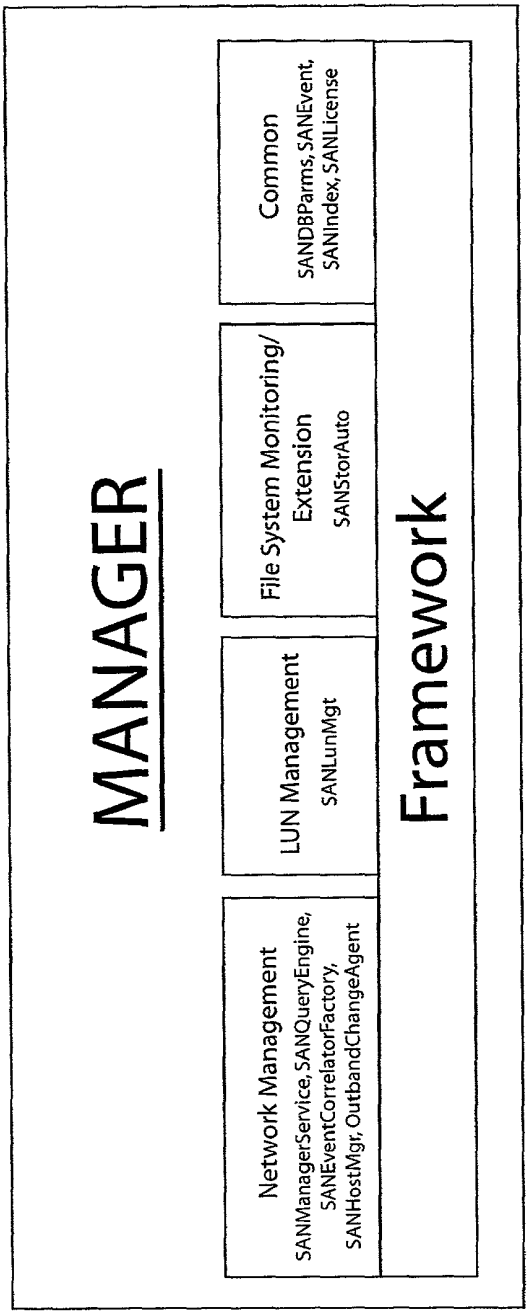
MANAGER
Network Management
SANManagerService, SANQueryEngine, SANEventCorrelatorFactory, SANHostMgr, OutbandChangeAgent
LUN Management
SANLunMgt
File System Monitoring/ Extension
SANStorAuto
Common
SANDBParms, SANEvent, SANIndex, SANLicense
Framework

Figure 5

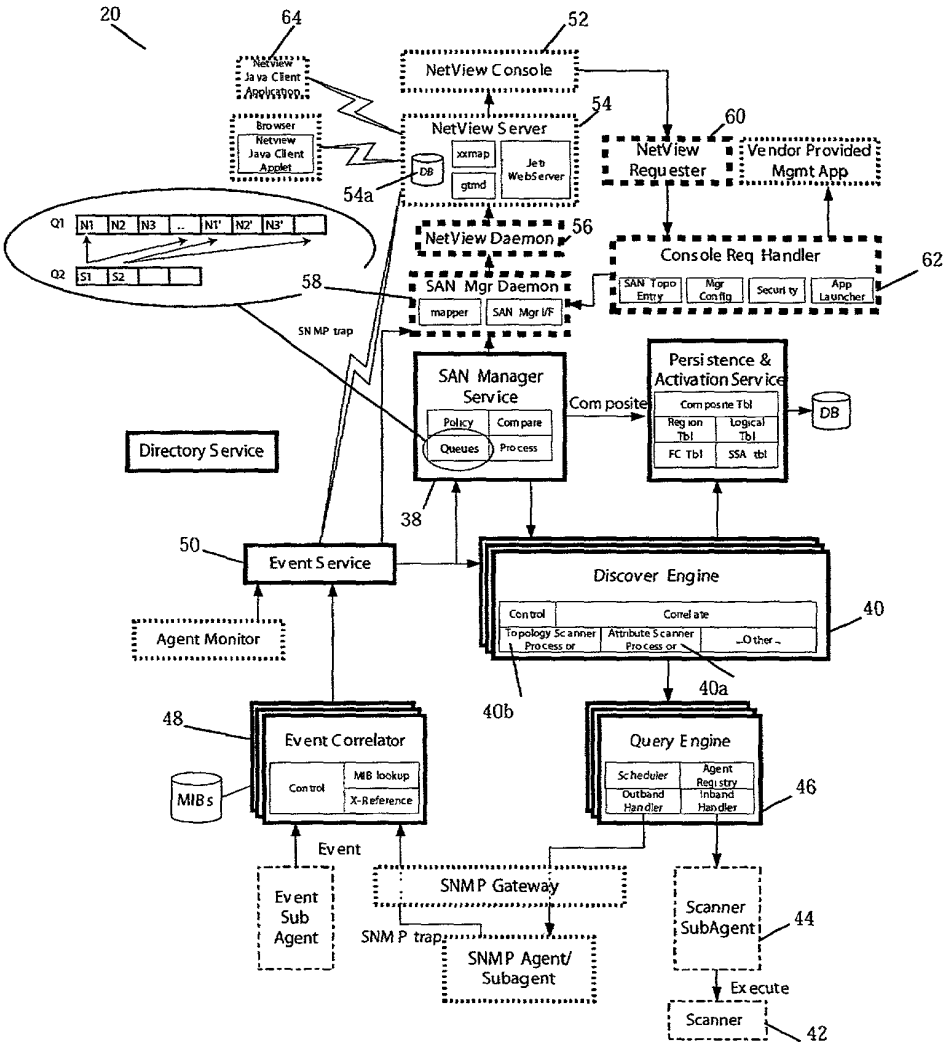
20
64
52
NetView Console
NetView Server
54
60
NetView Requester
Vendor Provided Mgmt App
xxmap
gtmd
Jet WebServer
DB
54a
Q1
N1
N2
N3
N1'
N2'
N3'
Q2
S1
S2
NetView Daemon
56
Console Req Handler
62
SAN Topo Entry
Mgr Config
Security
App Launcher
58
SAN Mgr Daemon
mapper
SAN Mgr I/F
SNMP trap
SAN Manager Service
Policy
Compare
Queues
Process
Composite
Persistence & Activation Service
Composite Tbl
Region Tbl
Logical Tbl
FC Tbl
SSA tbl
DB
Directory Service
38
50
Event Service
Discover Engine
Control
Correlate
Topology Scanner Processor
Attribute Scanner Processor
Other
40
Agent Monitor
40b
40a
48
Event Correlator
Control
MIB lookup
X-Reference
MIBs
Query Engine
Scheduler
Agent Registry
Outband Handler
Inband Handler
46
Event
Event Sub Agent
SNMP Gateway
SNMP trap
SNMP Agent/ Subagent
Scanner SubAgent
44
Execute
Scanner
42

Figure 6

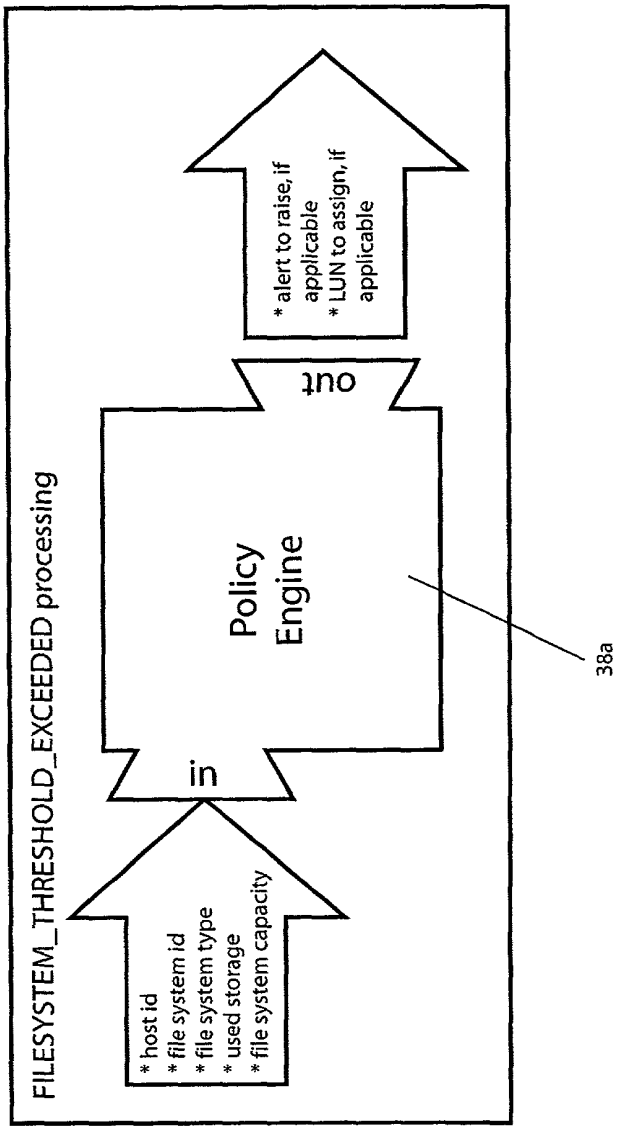
FILESYSTEM_THRESHOLD_EXCEEDED processing
* host id
* file system id
* file system type
* used storage
* file system capacity
in
Policy Engine
out
* alert to raise, if applicable
* LUN to assign, if applicable
38a

Figure 7A

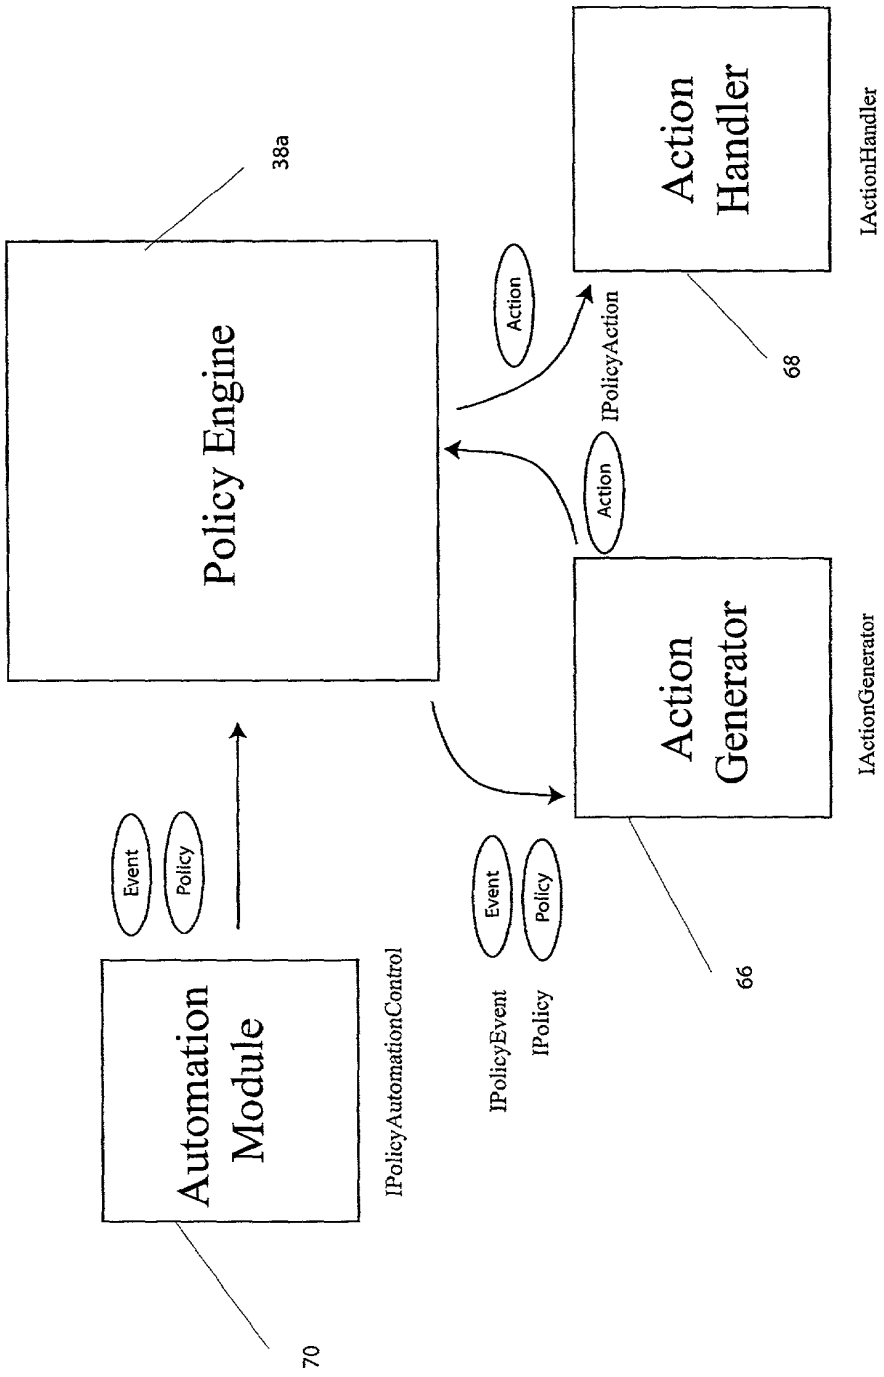
Automation Module
IPolicyAutomationControl
70
Event
Policy
IPolicyEvent
IPolicy
Policy Engine
38a
Action Generator
IActionGenerator
66
Action
IPolicyAction
Action Handler
IActionHandler
68

Figure 7B

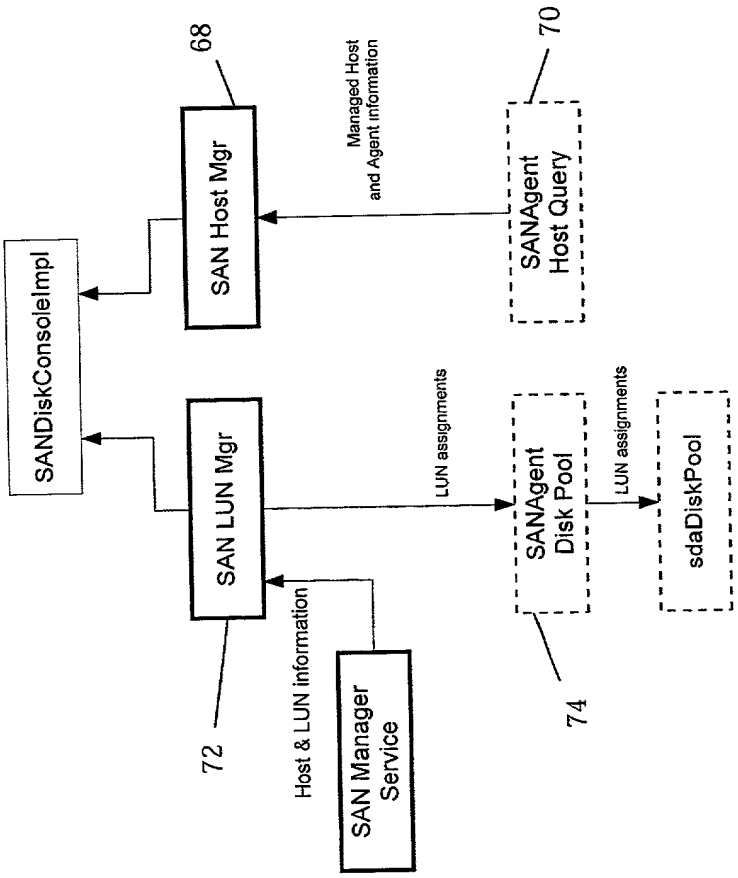
68
SAN Host Mgr
Managed Host
and Agent information
70
SANAgent
Host Query
SANDiskConsoleImpl
SAN LUN Mgr
LUN assignments
SANAgent
Disk Pool
LUN assignments
sdaDiskPool
72
Host & LUN information
SAN Manager
Service
74

Figure 8

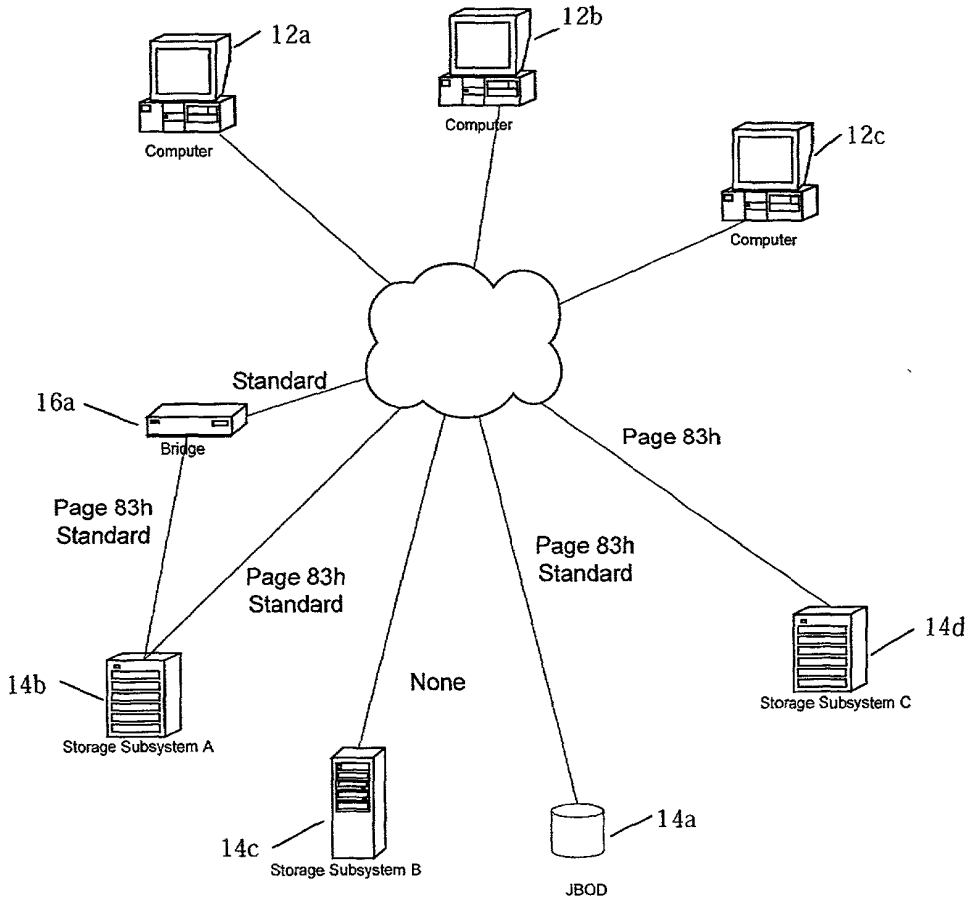
12a
Computer
12b
Computer
12c
Computer
Standard
16a
Bridge
Page 83h
Page 83h
Standard
Page 83h
Standard
Page 83h
Standard
14b
Storage Subsystem A
None
14c
Storage Subsystem B
14a
JBOD
14d
Storage Subsystem C

Figure 9

Figure 10

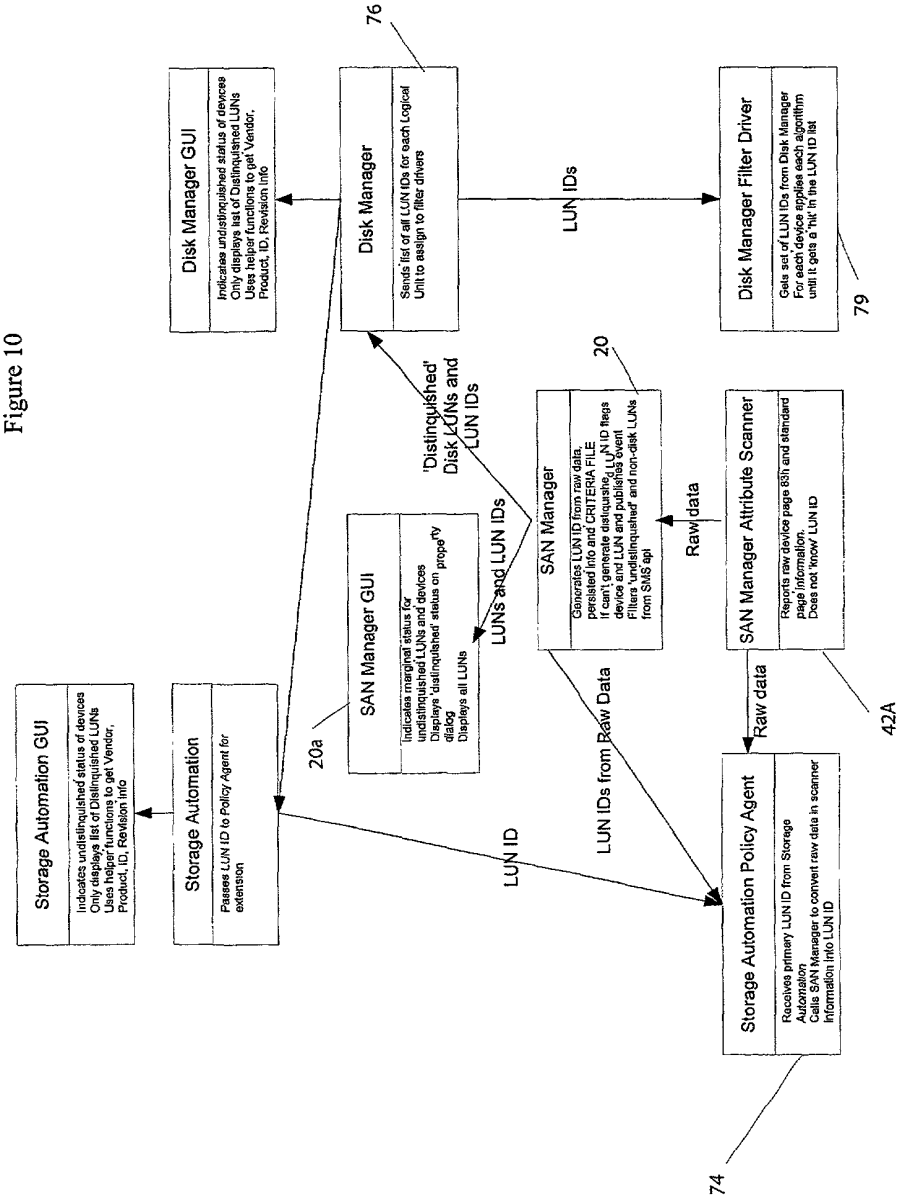
Storage Automation GUI
Indicates undistinguished status of devices
Only displays list of Distinguished LUNs
Uses helper functions to get Vendor, Product, ID, Revision info
Storage Automation
Passes LUN ID to Policy Agent for extension
LUN ID
Disk Manager GUI
Indicates undistinguished status of devices
Only displays list of Distinguished LUNs
Uses helper functions to get Vendor, Product, ID, Revision info
Disk Manager
Sends list of all LUN IDs for each Logical Unit to assign to filter drivers
76
LUN IDs
Disk Manager Filter Driver
Gets set of LUN IDs from Disk Manager
For each device applies each algorithm until it gets a 'hit' in the LUN ID list
79
'Distinguished' Disk LUNs and LUN IDs
SAN Manager GUI
Indicates marginal status for undistinguished LUNs and devices
Displays 'distinguished' status on properTy dialog
Displays all LUNs
20a
LUNs and LUN IDs
SAN Manager
Generates LUN ID from raw data, persisted info and CRITERIA FILE
If can't generate distiquishe, LUN ID flags device and LUN and publishes event
Filters 'undistinquished' and non-disk LUNs from SMS spi
20
Raw data
SAN Manager Attribute Scanner
Reports raw device page 83h and standard page information.
Does not 'know' LUN ID
42A
LUN IDs from Raw Data
Raw data
Storage Automation Policy Agent
Receives primary LUN ID from Storage Automation
Calls SAN Manager to convert raw data in scanner information into LUN ID
74

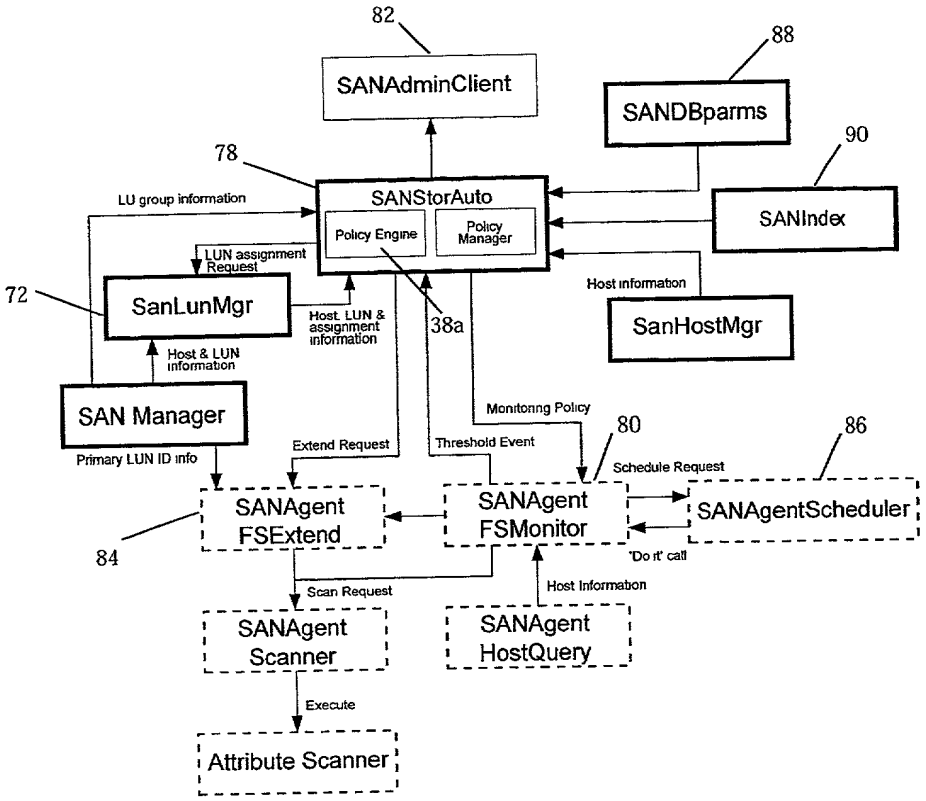
82
SANAdminClient
88
SANDBparms
90
78
SANStorAuto
Policy Engine
Policy Manager
SANIndex
LU group information
LUN assignment Request
72
SanLunMgr
Host LUN & assignment information
38a
Host information
SanHostMgr
Host & LUN information
SAN Manager
Monitoring Policy
80
86
Primary LUN ID info
Extend Request
Threshold Event
Schedule Request
SANAgent FSExtend
SANAgent FSMonitor
SANAgentScheduler
84
'Do it' call
Scan Request
Host Information
SANAgent Scanner
SANAgent HostQuery
Execute
Attribute Scanner

Figure 11

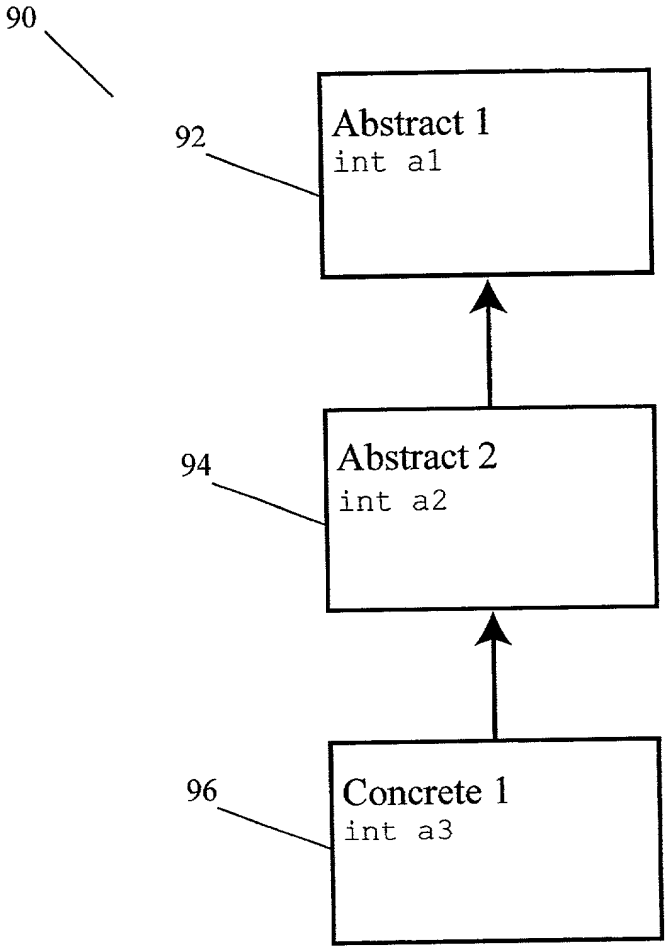
90
92
Abstract 1
int a1
94
Abstract 2
int a2
96
Concrete 1
int a3

Figure 12

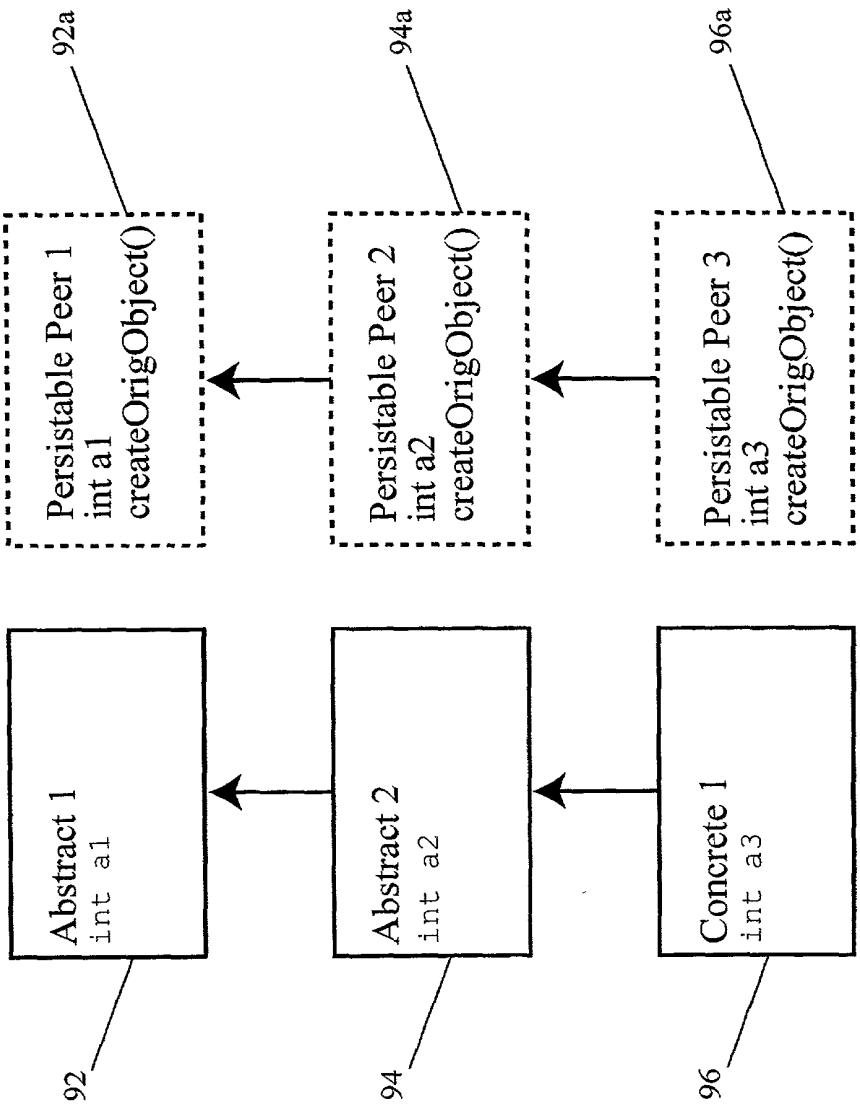
Persistable Peer 1
int a1
createOrigObject()
92a
Persistable Peer 2
int a2
createOrigObject()
94a
Persistable Peer 3
int a3
createOrigObject()
96a
Abstract 1
int a1
92
Abstract 2
int a2
94
Concrete 1
int a3
96

Figure 13

Figure 14a

Figure 14b

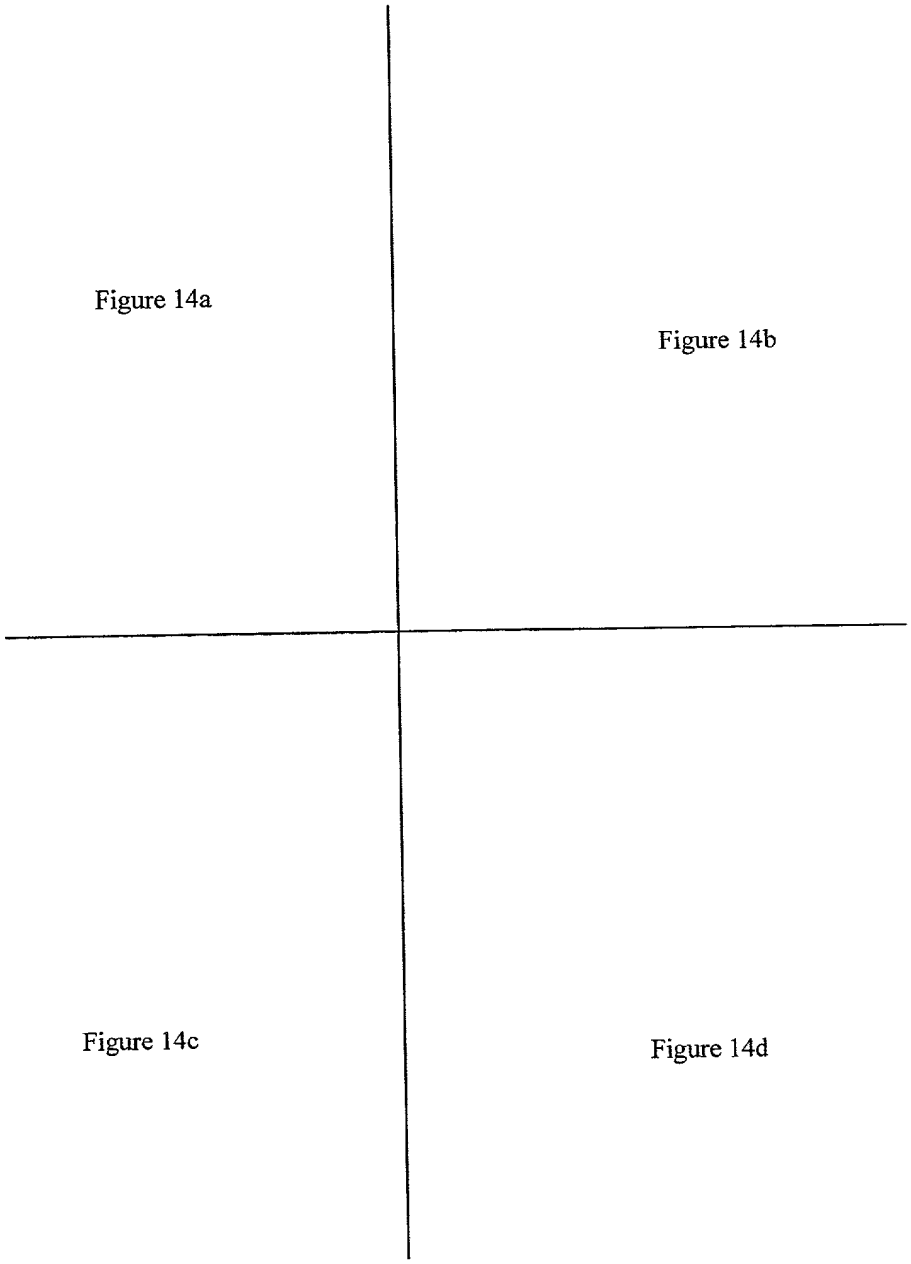

Figure 14c

Figure 14d

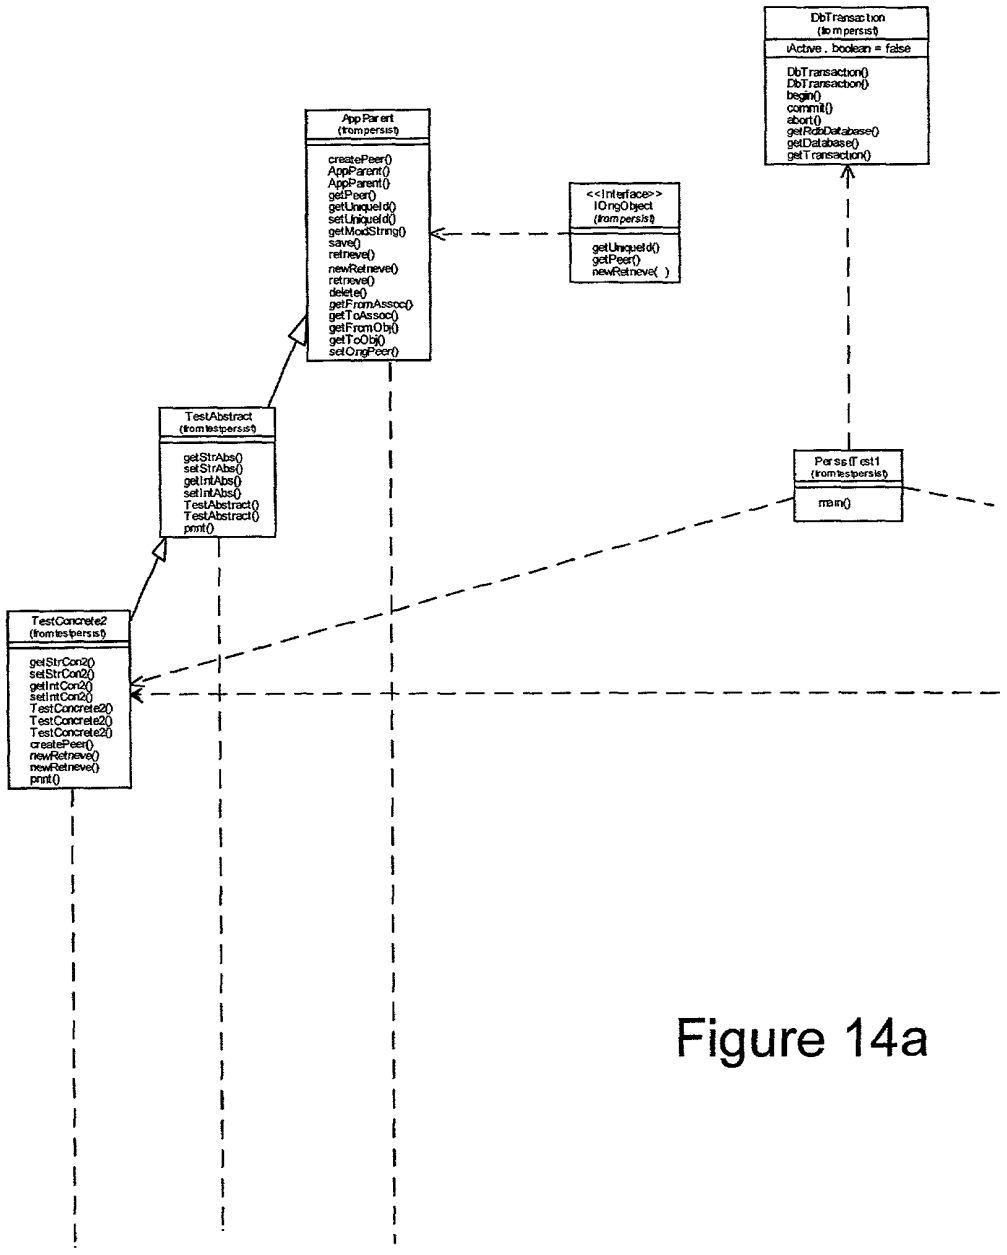
DbTransaction
(frompersist)
iActive . boolean = false
DbTransaction()
DbTransaction()
begin()
commit()
abort()
getPstsDatabase()
getDatabase()
getTransaction()
AppParent
(frompersist)
createPeer()
AppParent()
AppParent()
getPeer()
getUniqueId()
setUniqueId()
getModString()
save()
retrieve()
newRetrieve()
retrieve()
delete()
getFromAssoc()
getToAssoc()
getFromObj()
getToObj()
setOngPeer()
<<Interface>>
IOngObject
(frompersist)
getUniqueId()
getPeer()
newRetrieve( )
TestAbstract
(fromtestpersist)
getStrAbs()
setStrAbs()
getIntAbs()
setIntAbs()
TestAbstract()
TestAbstract()
pmt()
PerssTest1
(fromtestpersist)
main()
TestConcrete2
(fromtestpersist)
getStrCon2()
setStrCon2()
getIntCon2()
setIntCon2()
TestConcrete2()
TestConcrete2()
TestConcrete2()
createPeer()
newRetrieve()
newRetrieve()
pmt()

Figure 14a

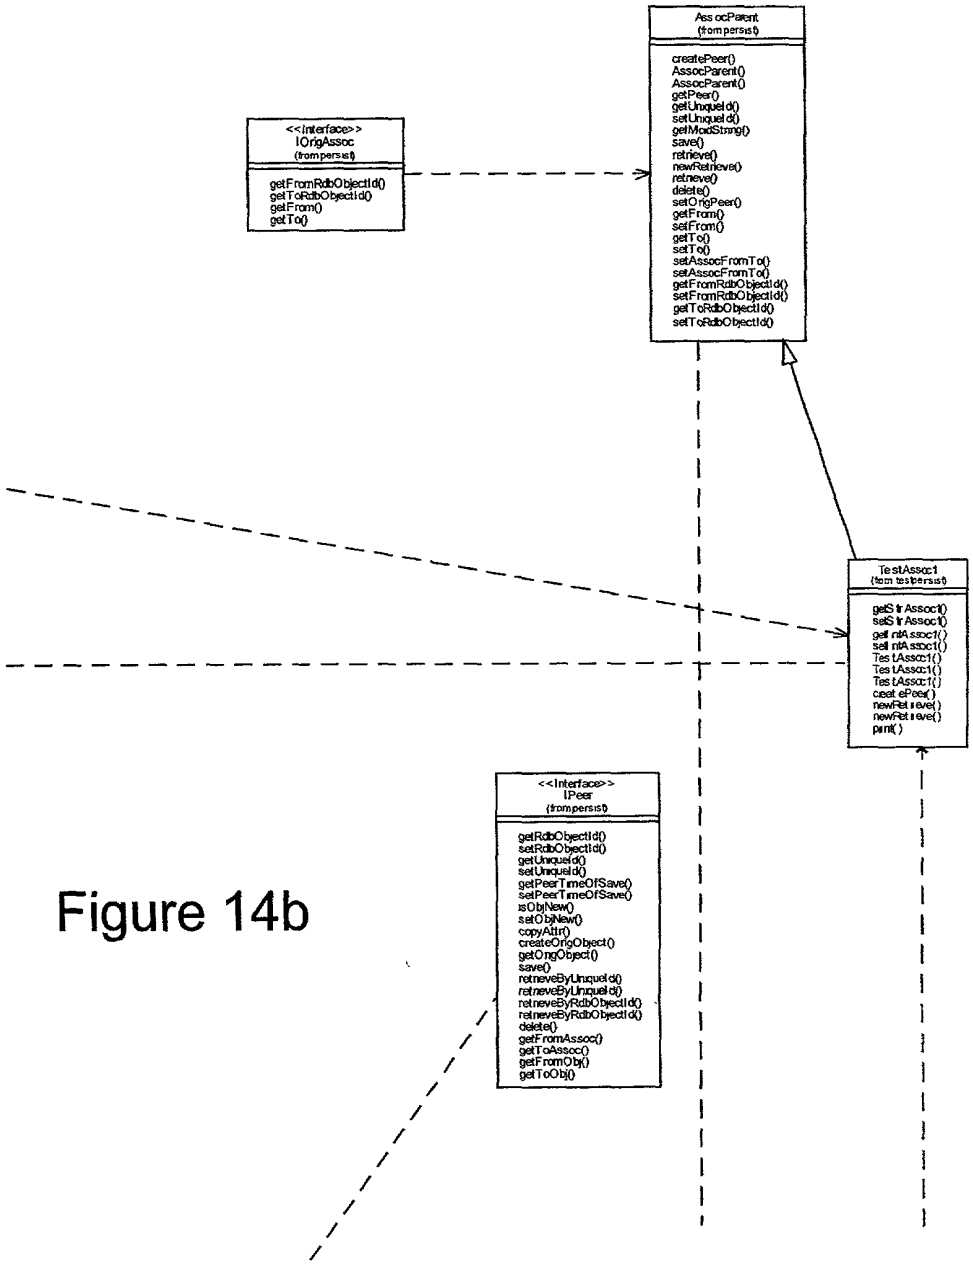
AssocParent
(frompersist)
createPeer()
AssocParent()
AssocParent()
getPeer()
getUniqueId()
setUniqueId()
getModString()
save()
retrieve()
newRetrieve()
retreve()
delete()
setOrigPeer()
getFrom()
setFrom()
getTo()
setTo()
setAssocFromTo()
setAssocFromTo()
getFromRdbObjectId()
setFromRdbObjectId()
getToRdbObjectId()
setToRdbObjectId()
<<Interface>>
IOrigAssoc
(frompersist)
getFromRdbObjectId()
getToRdbObjectId()
getFrom()
getTo()
TestAssoc1
(fom testpersist)
getStrAssoc1()
setStrAssoc1()
getIntAssoc1()
setIntAssoc1()
TestAssoc1()
TestAssoc1()
TestAssoc1()
createPeer()
newRetrieve()
newRetrieve()
print()
<<Interface>>
IPeer
(frompersist)
getRdbObjectId()
setRdbObjectId()
getUniqueId()
setUniqueId()
getPeerTimeOfSave()
setPeerTimeOfSave()
isObjNew()
setObjNew()
copyAttr()
createOrigObject()
getOrigObject()
save()
retreveByUniqueId()
retreveByUniqueId()
retreveByRdbObjectId()
retreveByRdbObjectId()
delete()
getFromAssoc()
getToAssoc()
getFromObj()
getToObj()

Figure 14b

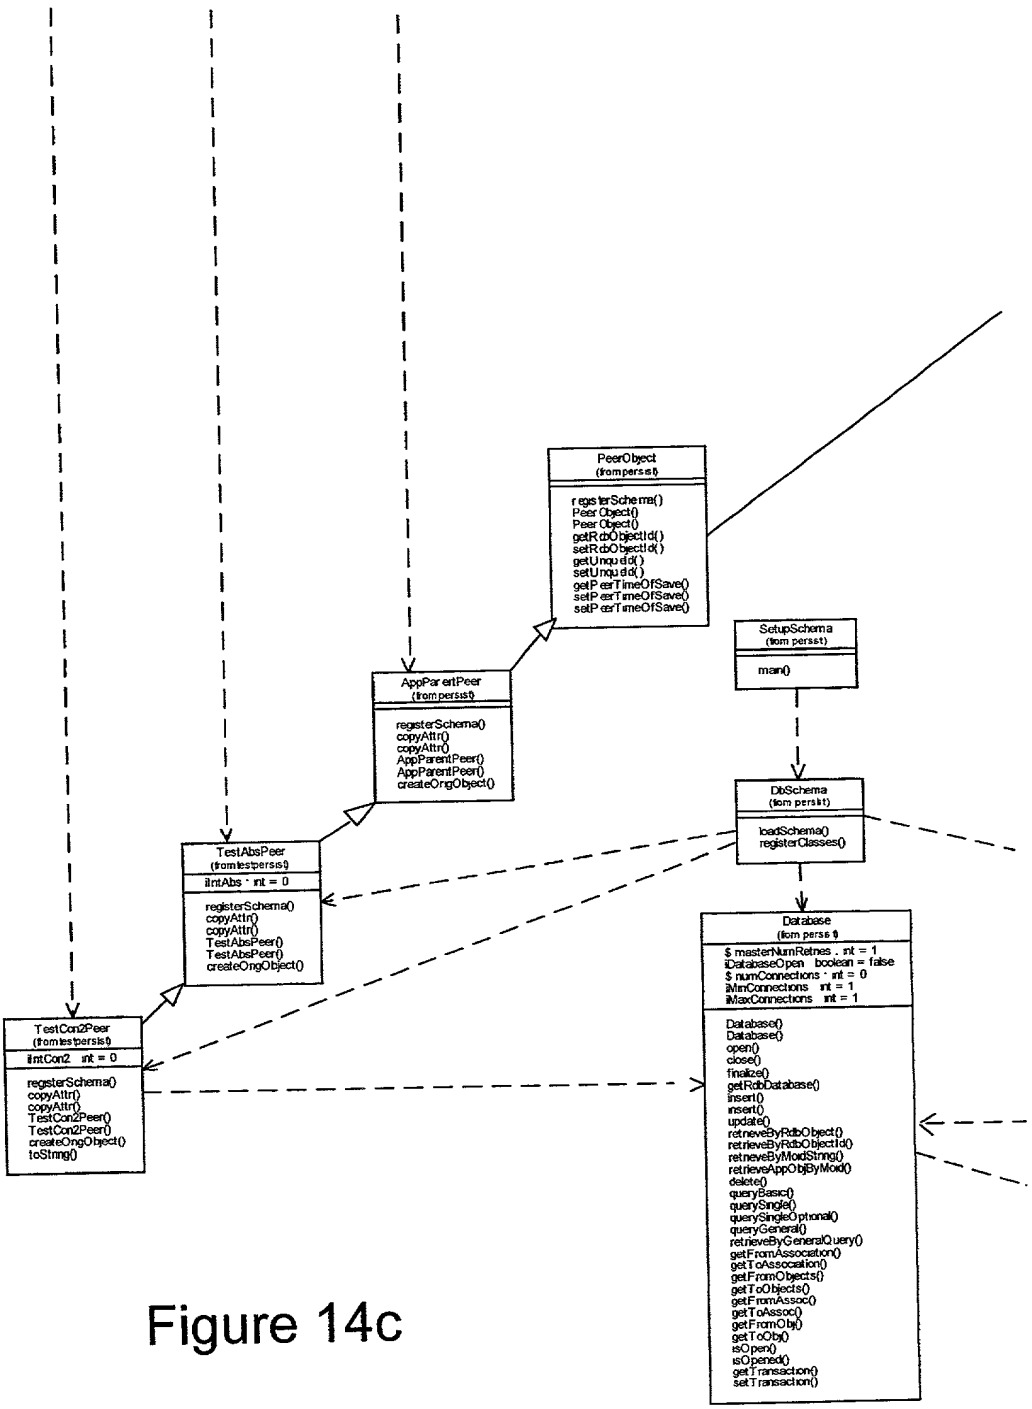
PeerObject
(frompersist)
registerSchema()
PeerObject()
PeerObject()
getRdbObjectId()
setRdbObjectId()
getUnquid()
setUnquid()
getPeerTimeOfSave()
setPeerTimeOfSave()
setPeerTimeOfSave()
SetupSchema
(from persist)
main()
AppParentPeer
(frompersist)
registerSchema()
copyAttr()
copyAttr()
AppParentPeer()
AppParentPeer()
createOrigObject()
DbSchema
(from persist)
loadSchema()
registerClasses()
TestAbsPeer
(fromtestpersist)
ilntAbs : int = 0
registerSchema()
copyAttr()
copyAttr()
TestAbsPeer()
TestAbsPeer()
createOrigObject()
Database
(from persist)
$ masterNumRetries : int = 1
iDatabaseOpen : boolean = false
$ numConnections : int = 0
iMinConnections : int = 1
iMaxConnections : int = 1
Database()
Database()
open()
close()
finalize()
getRdbDatabase()
insert()
insert()
update()
retrieveByRdbObject()
retrieveByRdbObjectId()
retrieveByModStrng()
retrieveAppObjByMod()
delete()
queryBasic()
querySingle()
querySingleOptional()
queryGeneral()
retrieveByGeneralQuery()
getFromAssociation()
getToAssociation()
getFromObjects()
getToObjects()
getFromAssoc()
getToAssoc()
getFromObj()
getToObj()
isOpen()
isOpened()
getTransaction()
setTransaction()
TestCon2Peer
(fromtestpersist)
ilntCon2 : int = 0
registerSchema()
copyAttr()
copyAttr()
TestCon2Peer()
TestCon2Peer()
createOrigObject()
toStrng()

Figure 14c

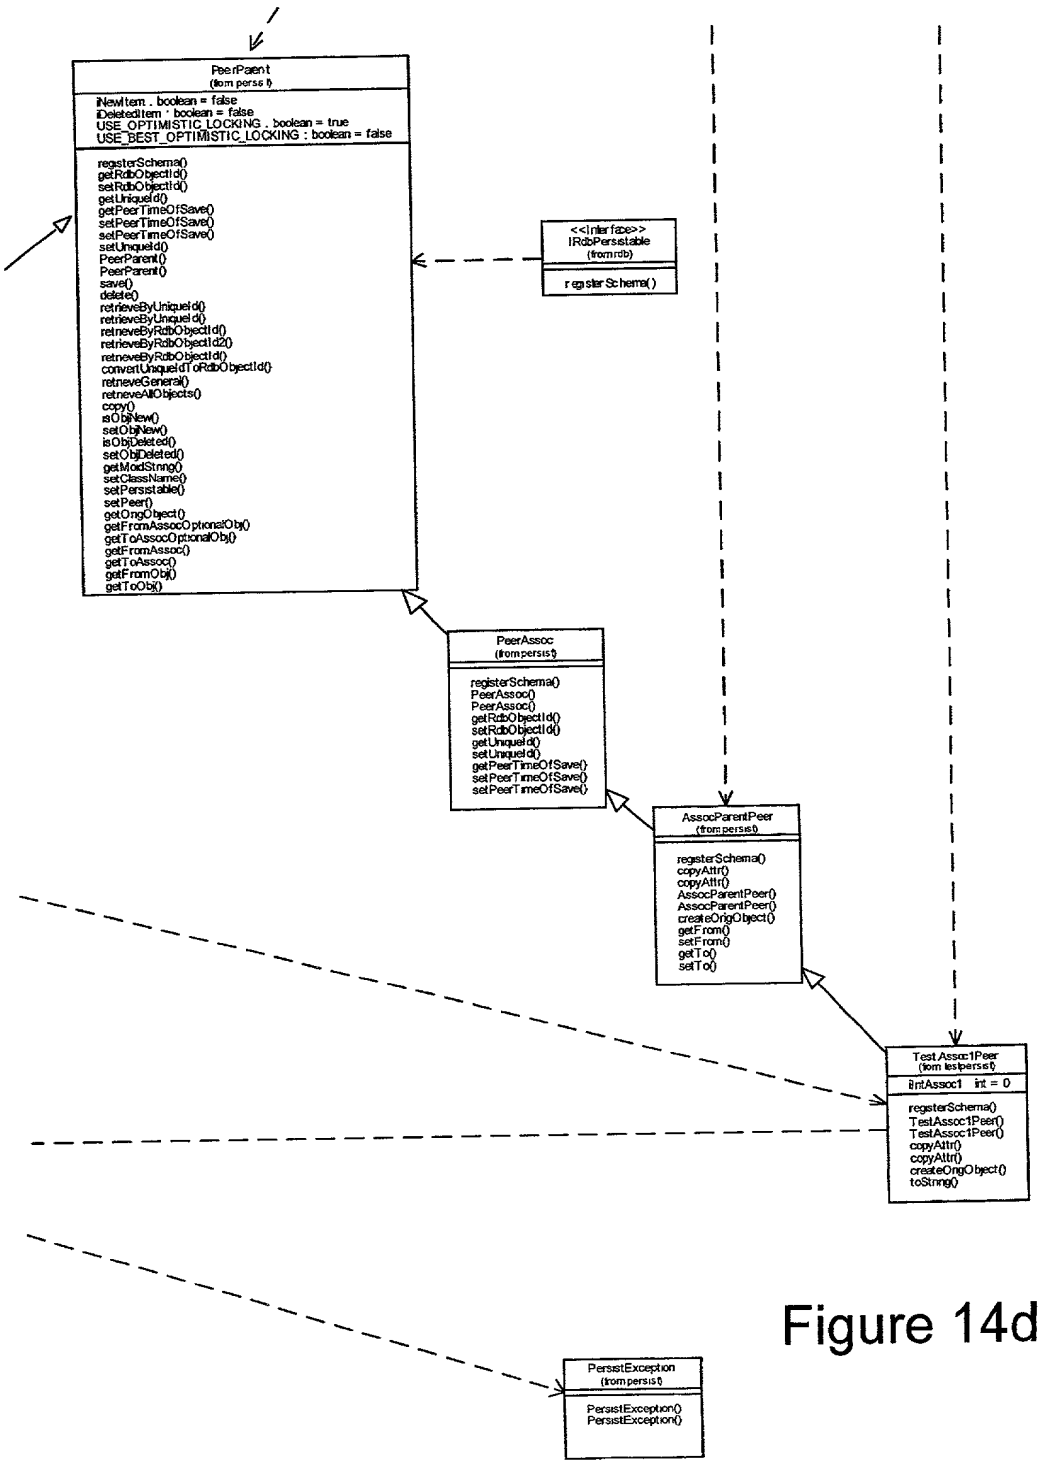
PeerParent
(from persist)
iNewItem : boolean = false
iDeletedItem : boolean = false
USE_OPTIMISTIC_LOCKING : boolean = true
USE_BEST_OPTIMISTIC_LOCKING : boolean = false
registerSchema()
getRdbObjectId()
setRdbObjectId()
getUniqueId()
getPeerTimeOfSave()
setPeerTimeOfSave()
setPeerTimeOfSave()
setUniqueId()
PeerParent()
PeerParent()
save()
delete()
retrieveByUniqueId()
retrieveByUniqueId()
retreveByRdbObjectId()
retrieveByRdbObjectId2()
retreveByRdbObjectId()
convertUniqueIdToRdbObjectId()
retreveGeneral()
retreveAllObjects()
copy()
isObjNew()
setObjNew()
isObjDeleted()
setObjDeleted()
getModStrng()
setClassName()
setPersistable()
setPeer()
getOrigObject()
getFromAssocOptionalObj()
getToAssocOptionalObj()
getFromAssoc()
getToAssoc()
getFromObj()
getToObj()
<<Interface>>
IRdbPersistable
(from rdb)
registerSchema()
PeerAssoc
(from persist)
registerSchema()
PeerAssoc()
PeerAssoc()
getRdbObjectId()
setRdbObjectId()
getUniqueId()
setUniqueId()
getPeerTimeOfSave()
setPeerTimeOfSave()
setPeerTimeOfSave()
AssocParentPeer
(from persist)
registerSchema()
copyAttr()
copyAttr()
AssocParentPeer()
AssocParentPeer()
createOrigObject()
getFrom()
setFrom()
getTo()
setTo()
Test Assoc1Peer
(from testpersist)
iIntAssoc1 : int = 0
registerSchema()
TestAssoc1Peer()
TestAssoc1Peer()
copyAttr()
copyAttr()
createOrigObject()
toStrng()
PersistException
(from persist)
PersistException()
PersistException()

Figure 14d

GUI (server) & Manager communication
▲ Manager creates objects (services) and "bind" them to Voyager directory service
▲ GUI "looks up" the object by name in directory service and get the object "proxy"
▲ GUI invokes object methods to obtain info or perform operation
Example: Class TDMServer( )
LUN[ ] getAccessibleLunsByHost(HostaHost)
LUN[ ] getAccessibleLunsByHost (java.lang.String ip)
LUN[ ] getAllAccessibleLuns( )
LUN[ ] getAssignedLunsByHost(HostaHost)
LUN[ ] getAssignedLunsByHost(java.lang.String ip)
// Look up the ITdm Server proxy object from the directory service
ITdmServeraTdm = (ITdm Server) Namespace.lookup(
"//localhost:9000/sandir/TdmServer");
// Get a list of all LUN objects in the region.
LUN[ ] temp1 = aTdm.getAllAccessibleLuns( );
GUI server
Presentation
TCP/IP - ORB
Manager
Voyager
DB2
Oracle
machine B
W2K, AIX
98
20

Figure 15

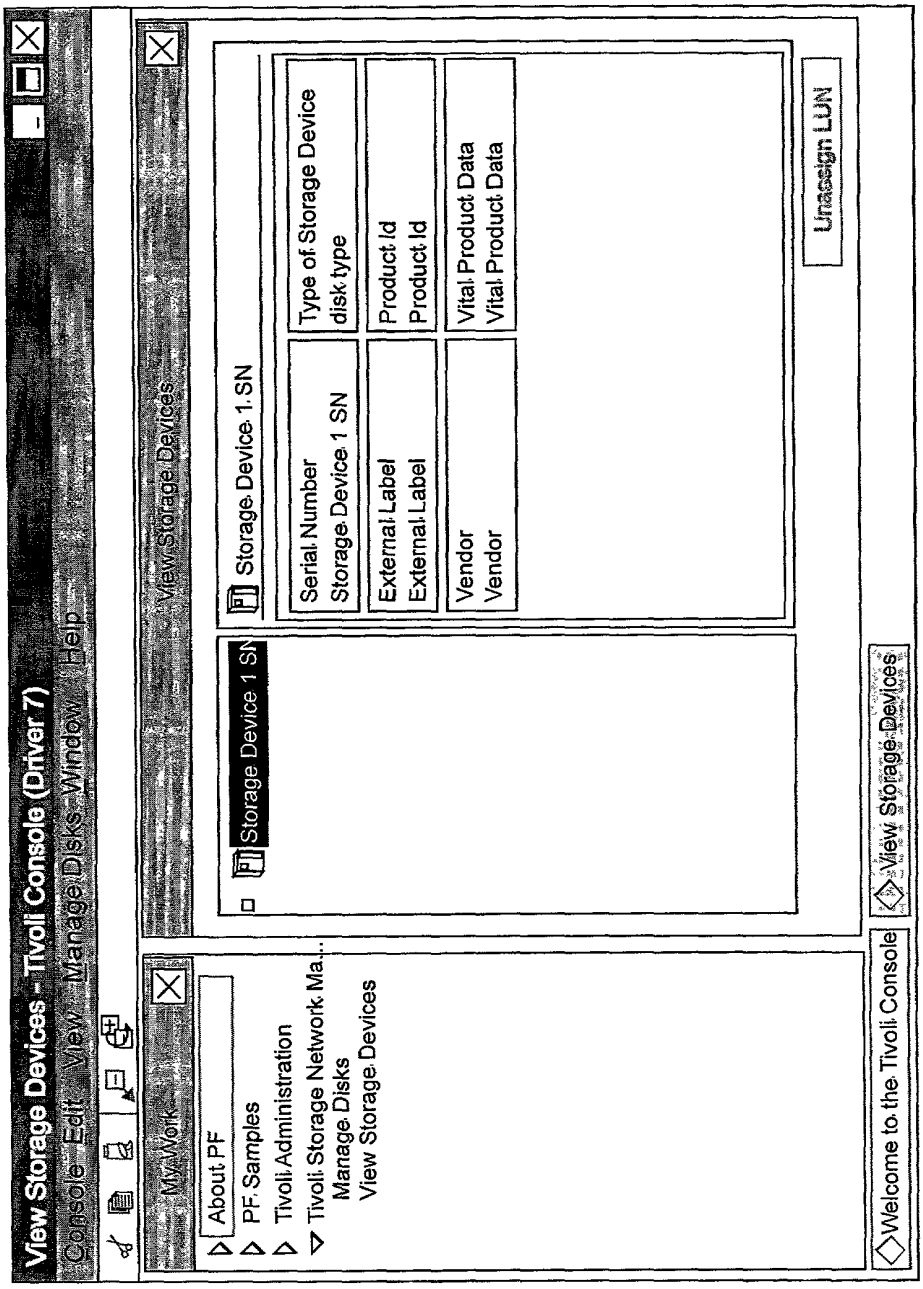
100
View Storage Devices - Tivoli Console (Driver 7)
Console Edit View Manage Disks Window Help
My Work
About PF
PF Samples
Tivoli Administration
Tivoli Storage Network Ma...
Manage Disks
View Storage Devices
View Storage Devices
Storage Device 1 SN
Storage Device 1 SN
Serial Number
Storage Device 1 SN
External Label
External Label
Vendor
Vendor
Type of Storage Device
disk type
Product Id
Product Id
Vital Product Data
Vital Product Data
Unassign LUN
Welcome to the Tivoli Console
View Storage Devices

Figure 16

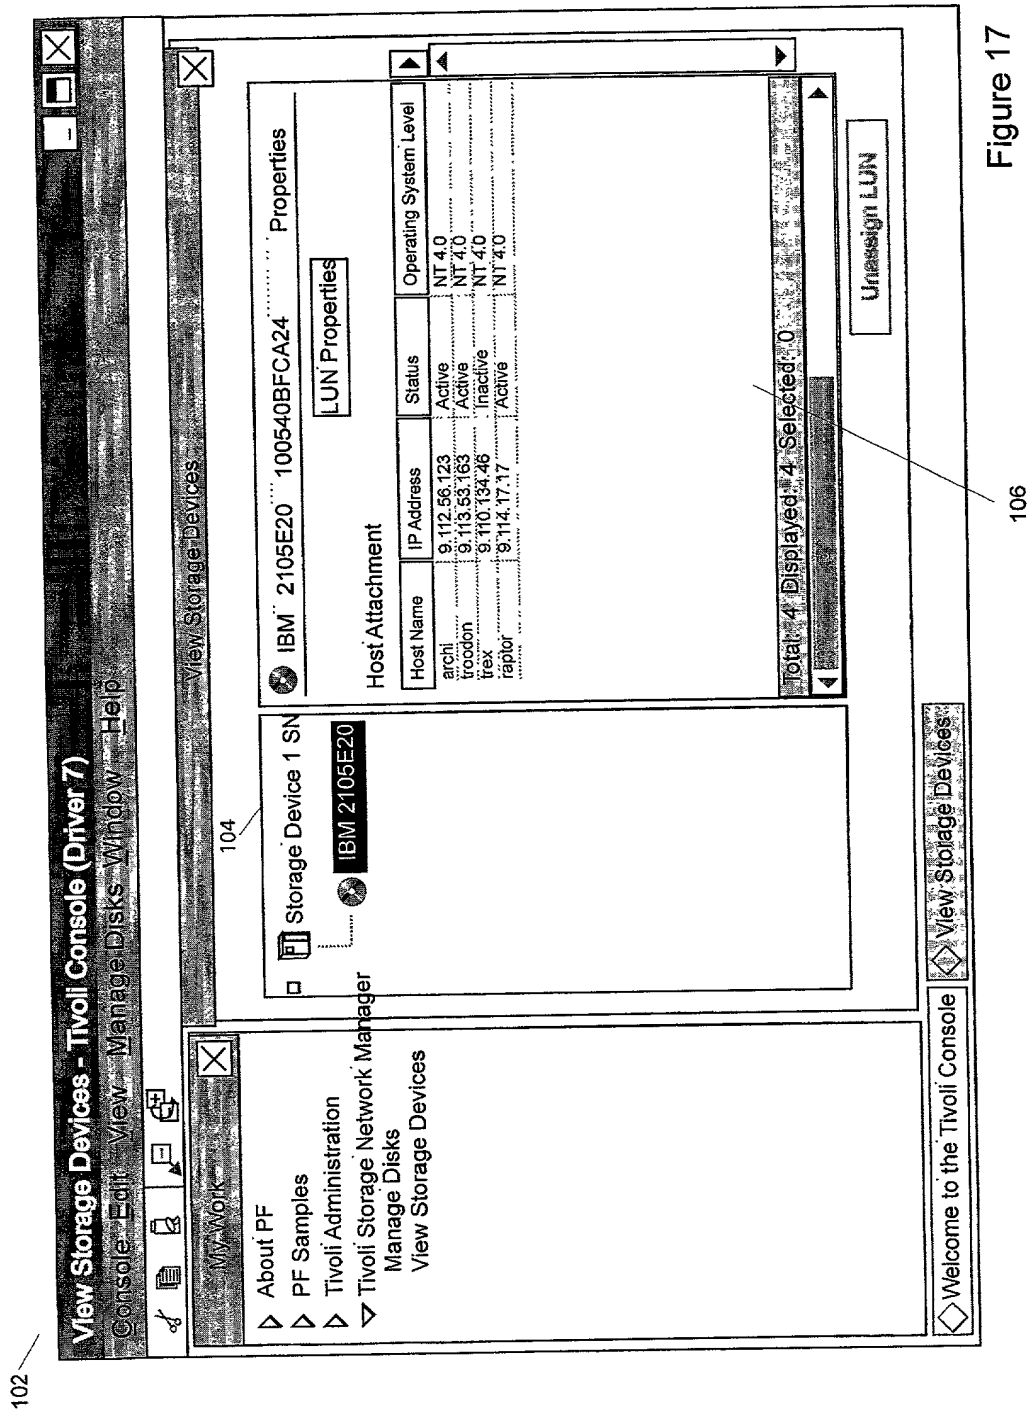
View Storage Devices - Tivoli Console (Driver 7)
Console Edit View Manage Disks Window Help
My Work
About PF
PF Samples
Tivoli Administration
Tivoli Storage Network Manager
Manage Disks
View Storage Devices
Storage Device 1 SN
IBM 2105E20
IBM 2105E20 100540BFCA24 Properties
LUN Properties
Host Attachment
Host Name
IP Address
Status
Operating System Level
archi 9.112.56.123 Active NT 4.0
troodon 9.113.53.163 Active NT 4.0
trex 9.110.134.46 Inactive NT 4.0
raptor 9.114.17.17 Active NT 4.0
Total: 4 Displayed: 4 Selected: 0
Unassign LUN
Welcome to the Tivoli Console
View Storage Devices
102
104
106

Figure 17

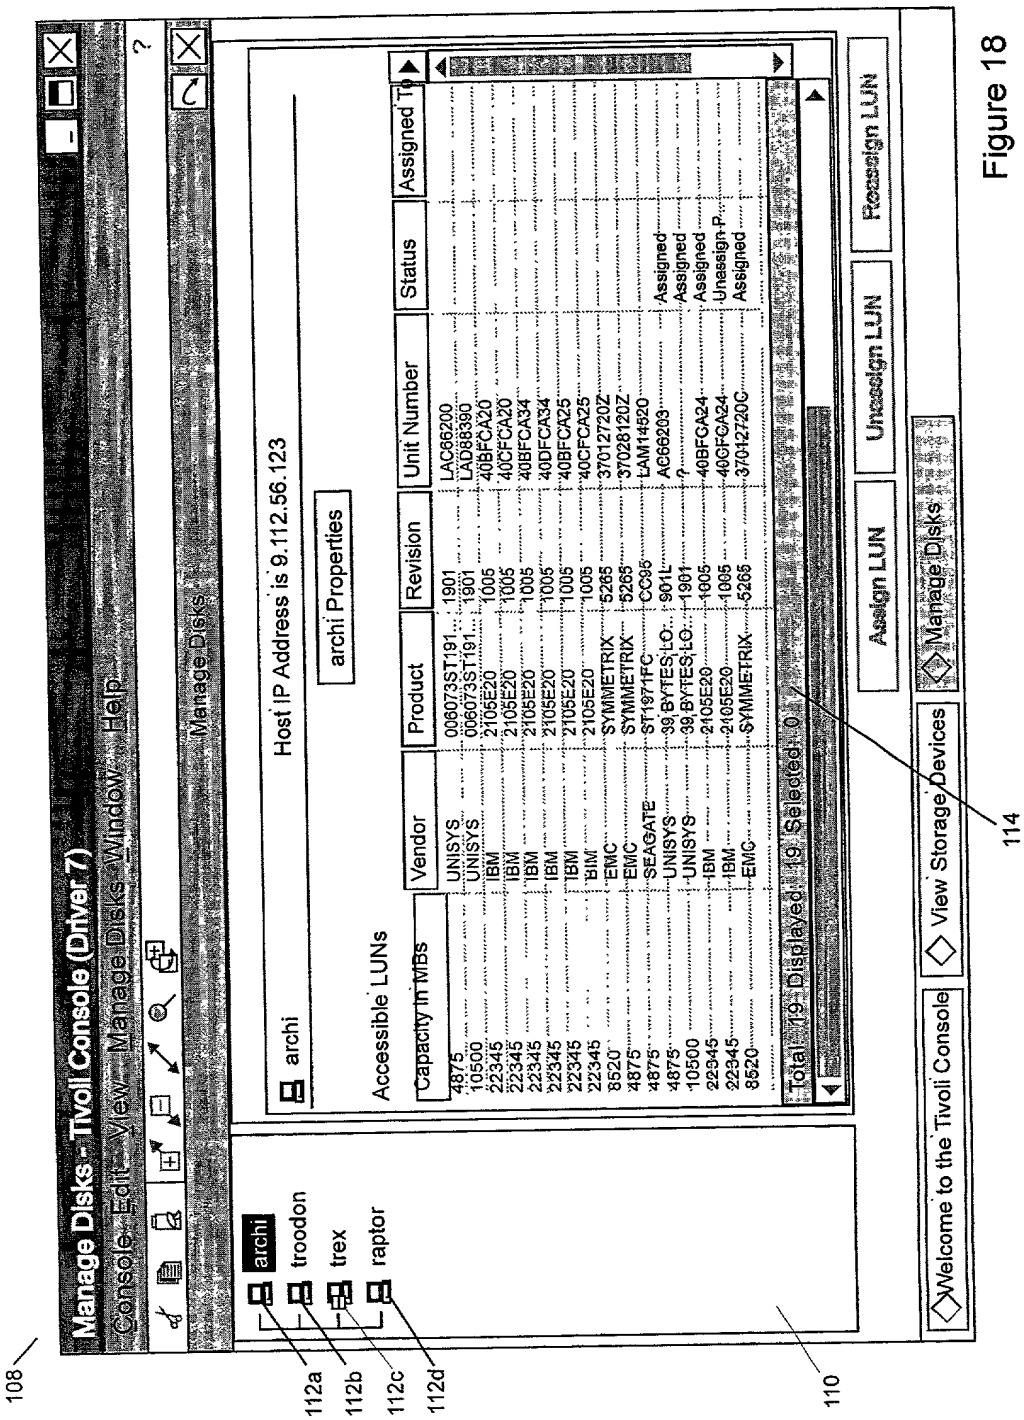
Manage Disks - Tivoli Console (Driver 7)
Console Edit View Manage Disks Window Help
Manage Disks
archi
troodon
trex
raptor
Host IP Address is 9.112.56.123
archi Properties
Accessible LUNs
Capacity in MBs
Vendor
Product
Revision
Unit Number
Status
Assigned To
Total 19 Displayed 19 Selected 0
Assign LUN
Unassign LUN
Reassign LUN
Welcome to the Tivoli Console
View Storage Devices
Manage Disks
108
112a
112b
112c
112d
110
114

Figure 18

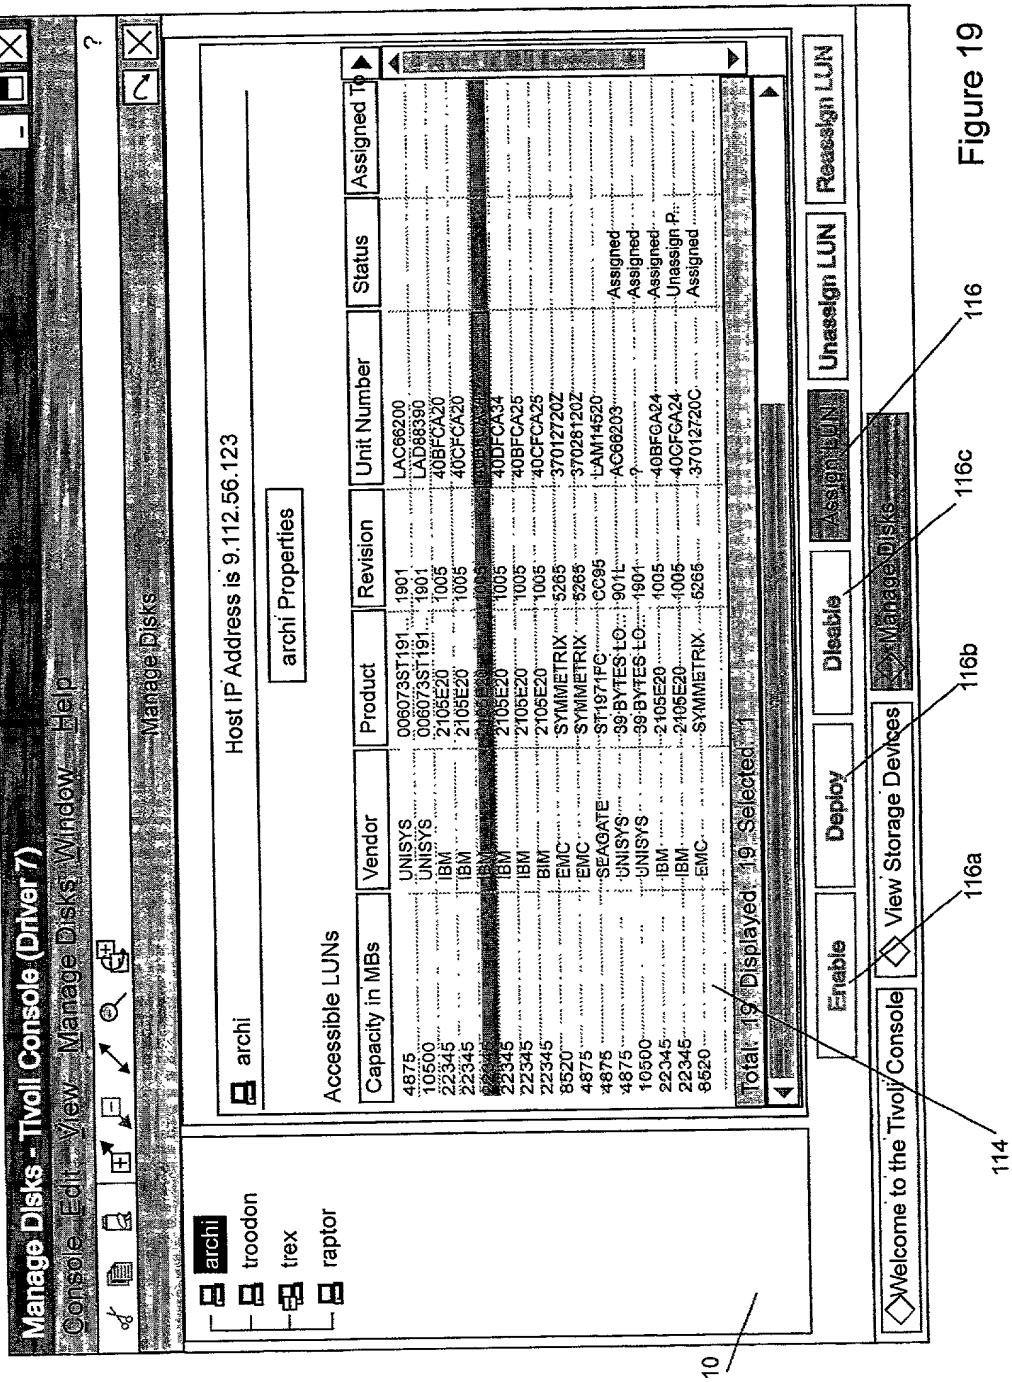
Manage Disks - Tivoli Console (Driver 7)
Console Edit View Manage Disks Window Help
archi
troodon
trex
raptor
Manage Disks
archi
Host IP Address is 9.112.56.123
archi Properties
Accessible LUNs
Capacity in MBs
Vendor
Product
Revision
Unit Number
Status
Assigned To
Total 19 Displayed 19 Selected 1
Enable
Deploy
Disable
Assign LUN
Unassign LUN
Reassign LUN
Welcome to the Tivoli Console
View Storage Devices
Manage Disks
110
114
116a
116b
116c
116

Figure 19

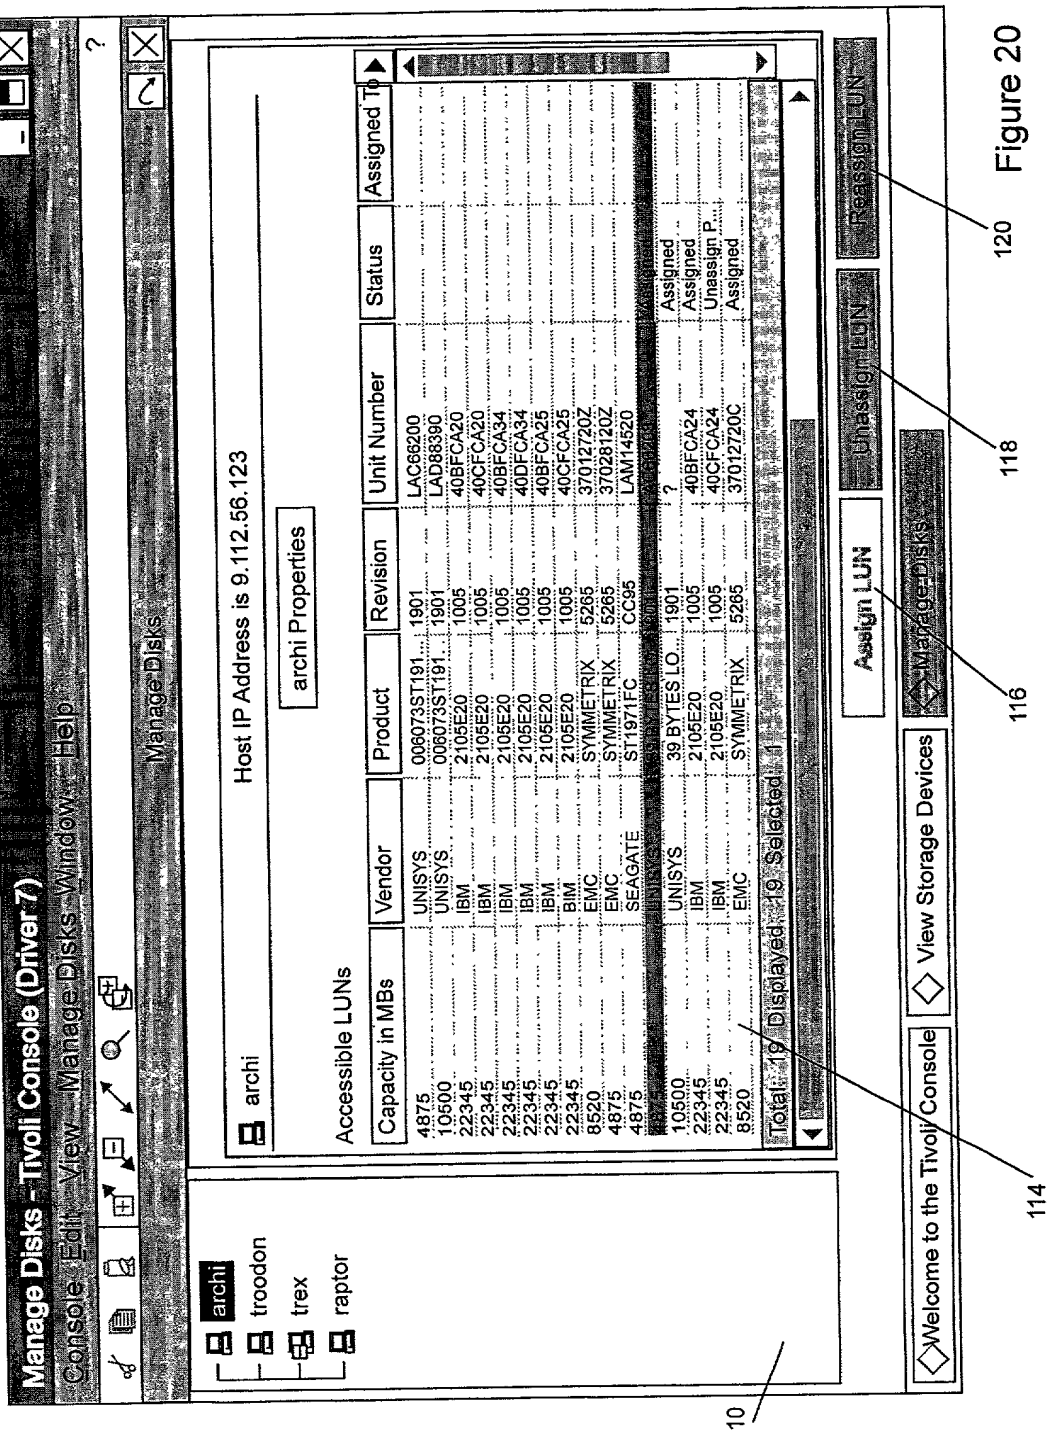
Manage Disks - Tivoli Console (Driver 7)
Console Edit View Manage Disks Window Help
Manage Disks
archi
troodon
trex
raptor
archi
Host IP Address is 9.112.56.123
archi Properties
Accessible LUNs
Capacity in MBs
Vendor
Product
Revision
Unit Number
Status
Assigned To
4875 UNISYS 006073ST191... 1901 LAC66200
10500 UNISYS 006073ST191... 1901 LAD88390
22345 IBM 2105E20 1005 40BFCA20
22345 IBM 2105E20 1005 40CFCA20
22345 IBM 2105E20 1005 40BFCA34
22345 IBM 2105E20 1005 40DFCA34
22345 IBM 2105E20 1005 40BFCA25
22345 IBM 2105E20 1005 40CFCA25
8520 EMC SYMMETRIX 5265 370127Z0Z
4875 EMC SYMMETRIX 5265 370281Z0Z
4875 SEAGATE ST1971FC CC95 LAM14520
10500 UNISYS 39 BYTES LO... 1901 ? Assigned
22345 IBM 2105E20 1005 40BFCA24 Assigned
22345 IBM 2105E20 1005 40CFCA24 Unassign P...
8520 EMC SYMMETRIX 5265 370127Z0C Assigned
Total: 19 Displayed: 19 Selected: 1
Assign LUN
Unassign LUN
Reassign LUN
Manage Disks
Welcome to the Tivoli Console
View Storage Devices
110
114
116
118
120

Figure 20

Clearing the Filter

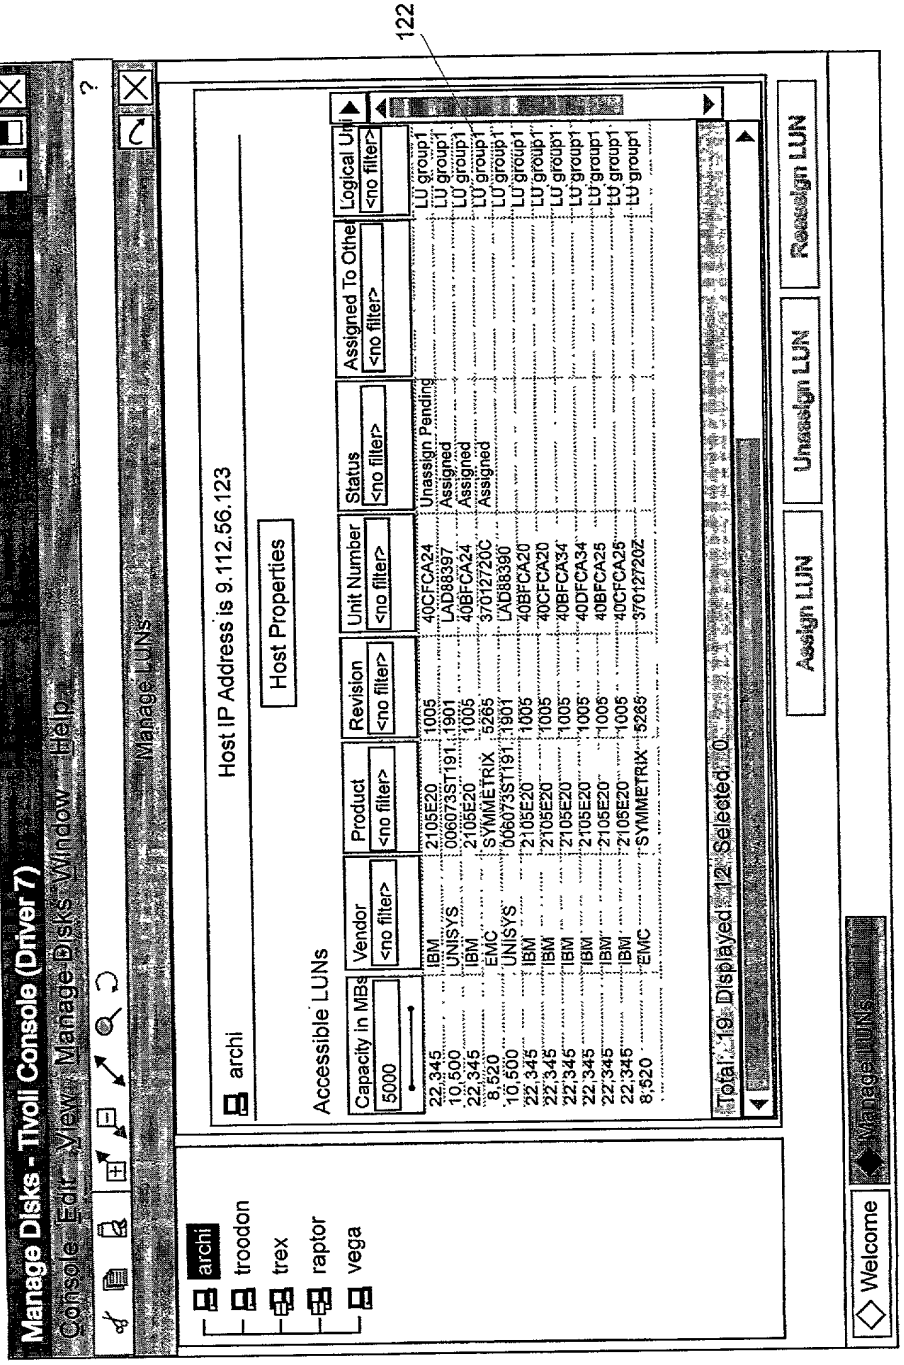

Figure 21

Custom Filtering

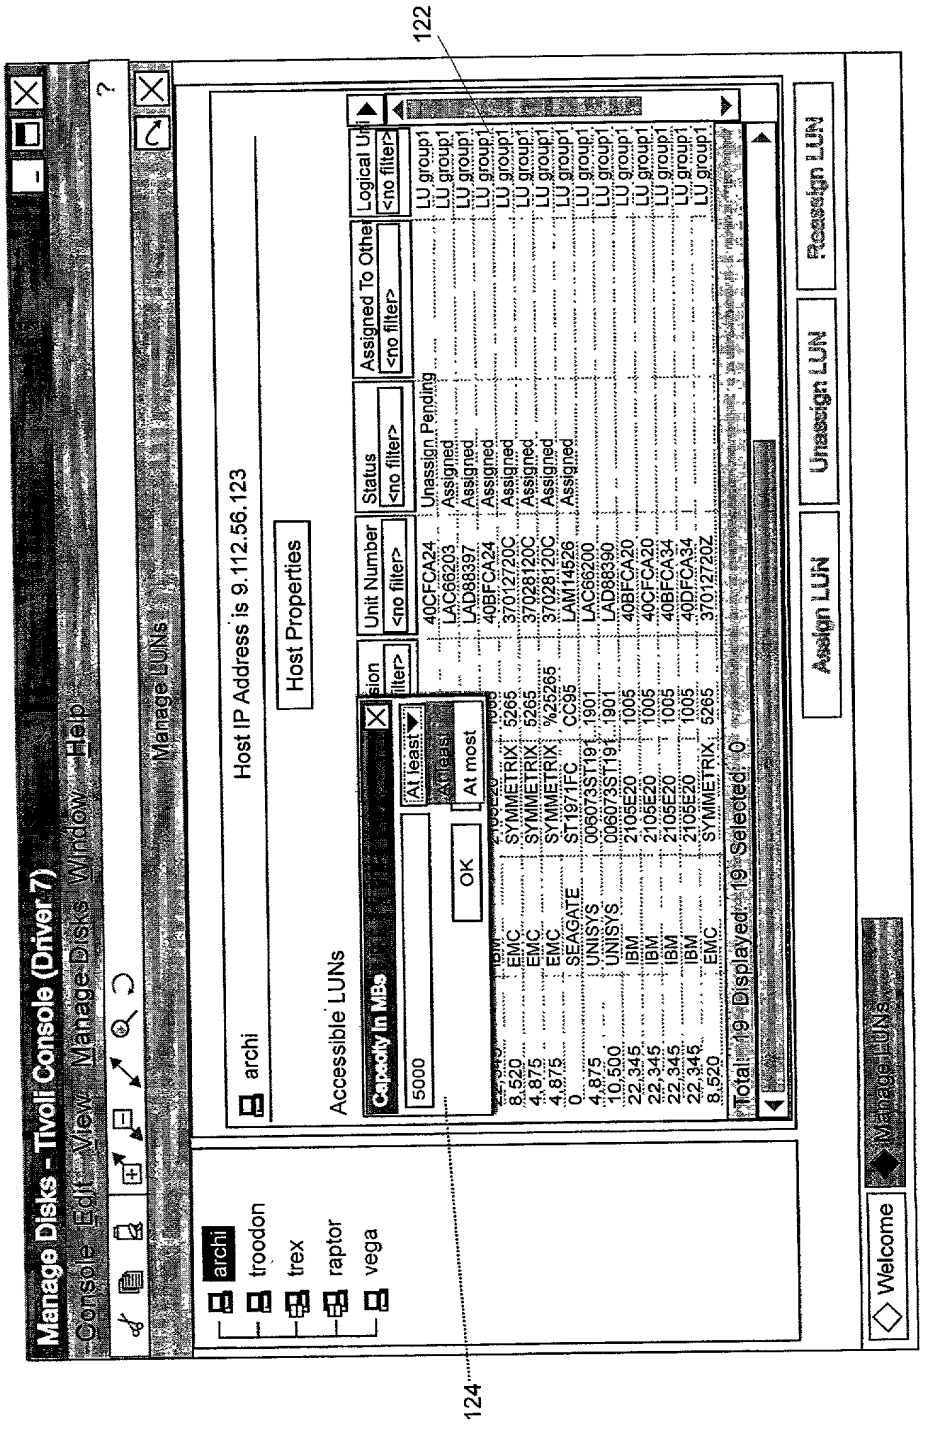

Figure 22

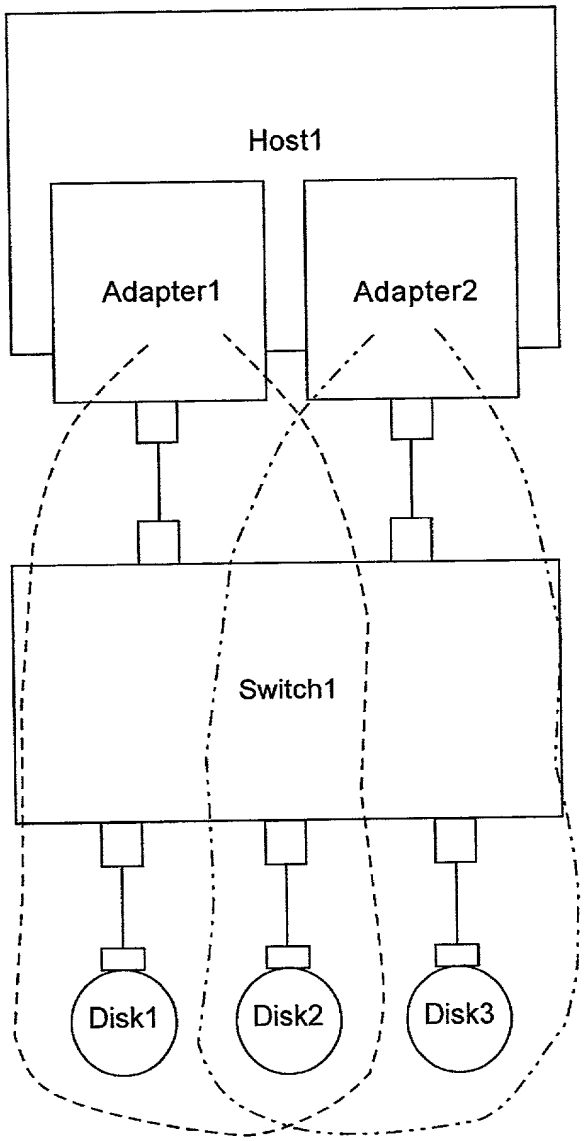

Figure 23

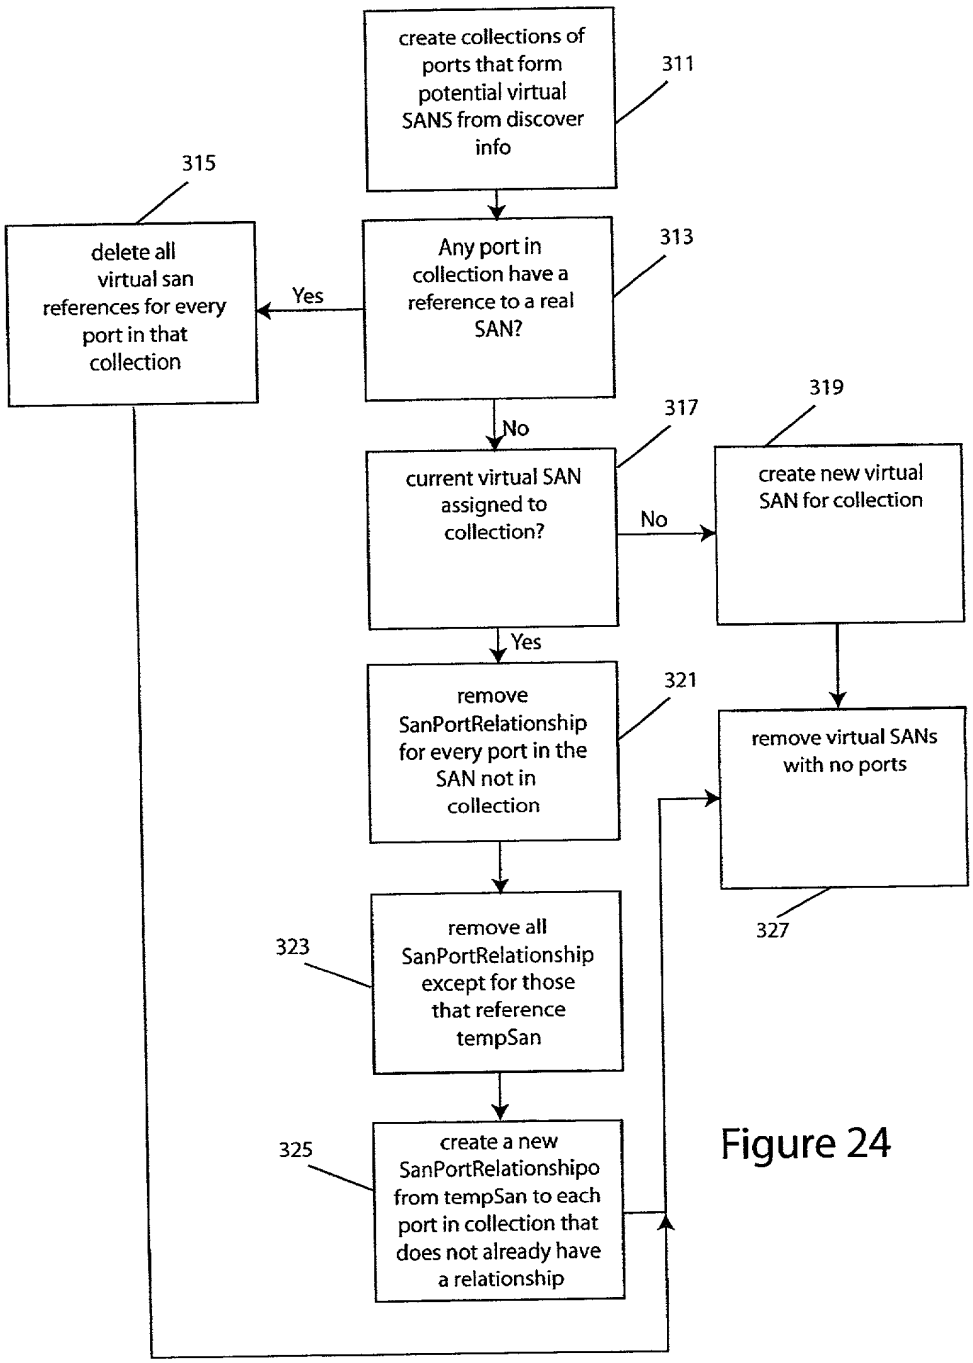
create collections of ports that form potential virtual SANS from discover info
311
Any port in collection have a reference to a real SAN?
313
Yes
delete all virtual san references for every port in that collection
315
No
current virtual SAN assigned to collection?
317
No
create new virtual SAN for collection
319
Yes
remove SanPortRelationship for every port in the SAN not in collection
321
remove virtual SANs with no ports
327
remove all SanPortRelationship except for those that reference tempSan
323
create a new SanPortRelationshipo from tempSan to each port in collection that does not already have a relationship
325

Figure 24

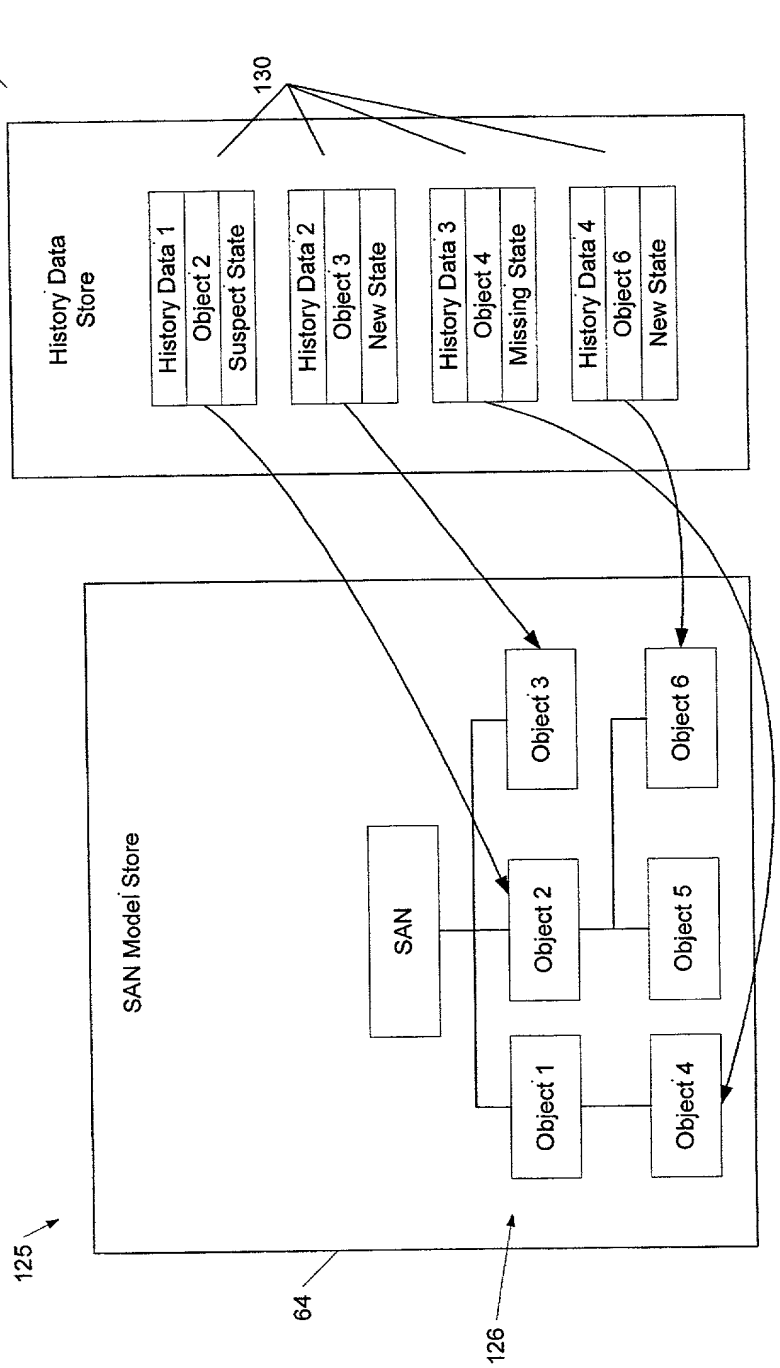
128
130
History Data Store
History Data 1
Object 2
Suspect State
History Data 2
Object 3
New State
History Data 3
Object 4
Missing State
History Data 4
Object 6
New State
SAN Model Store
SAN
Object 1
Object 2
Object 3
Object 4
Object 5
Object 6
125
64
126

FIGURE 25

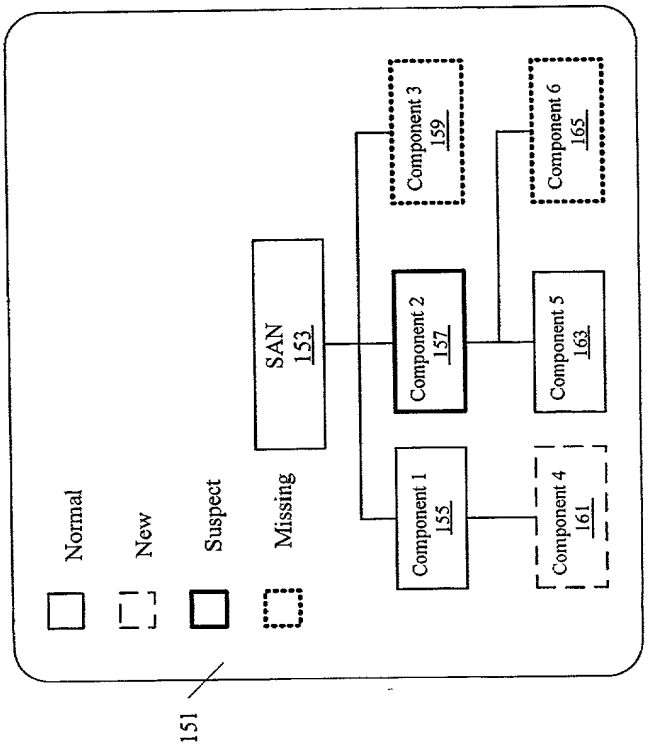
Normal
New
Suspect
Missing
SAN
153
Component 1
155
Component 2
157
Component 3
159
Component 4
161
Component 5
163
Component 6
165
151

FIGURE 26

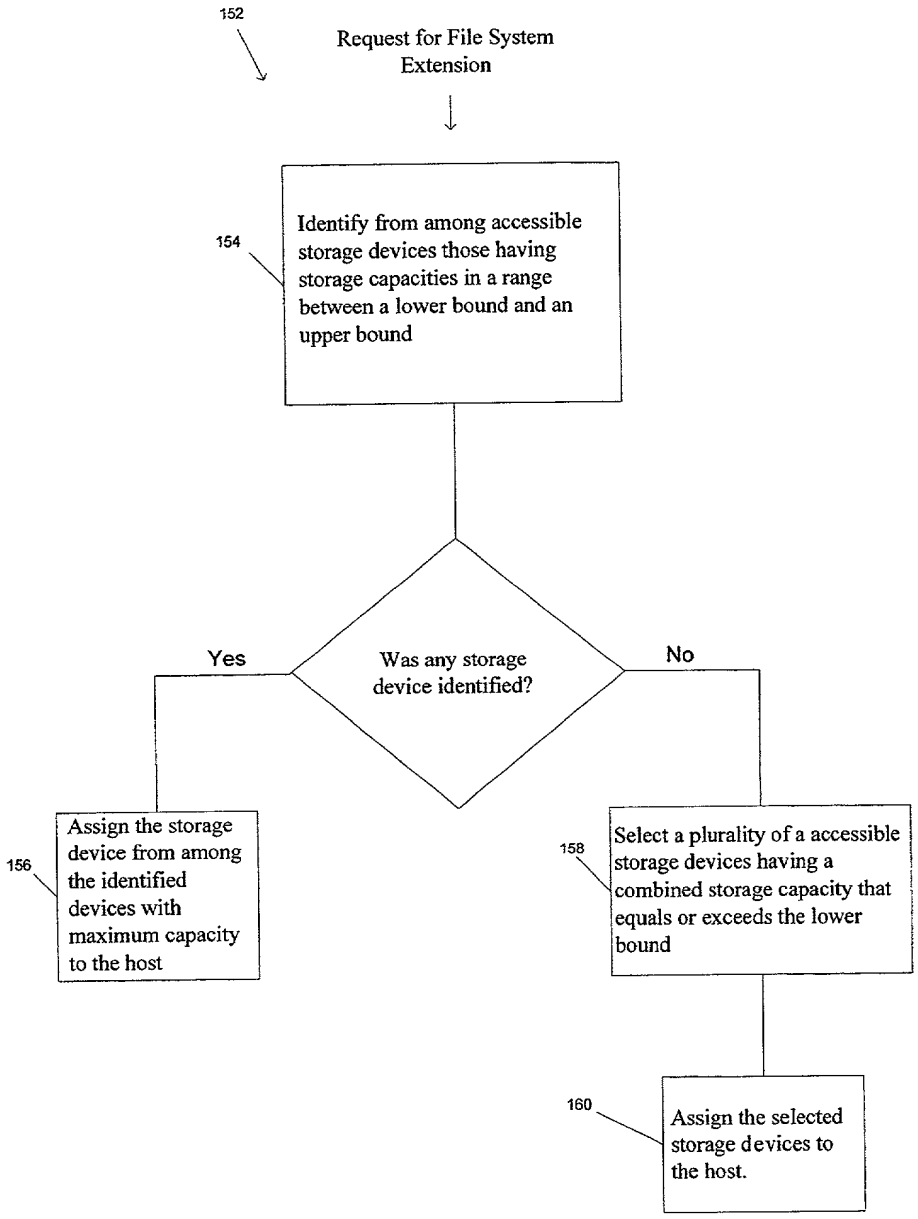
152
Request for File System Extension
154
Identify from among accessible storage devices those having storage capacities in a range between a lower bound and an upper bound
Was any storage device identified?
Yes
No
156
Assign the storage device from among the identified devices with maximum capacity to the host
158
Select a plurality of a accessible storage devices having a combined storage capacity that equals or exceeds the lower bound
160
Assign the selected storage devices to the host.

Figure 27

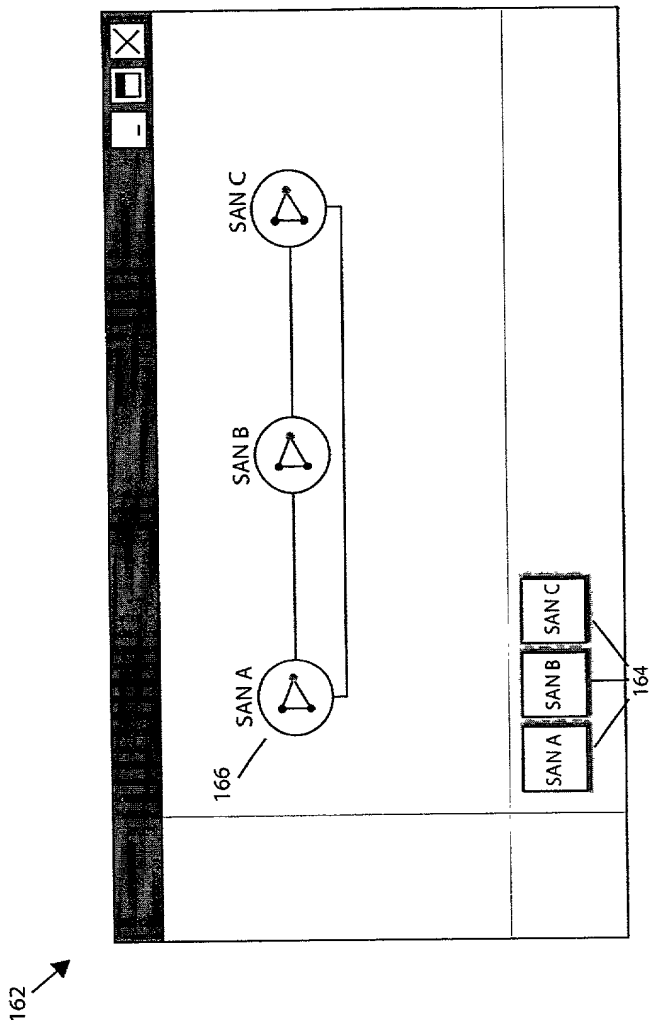

Figure 28

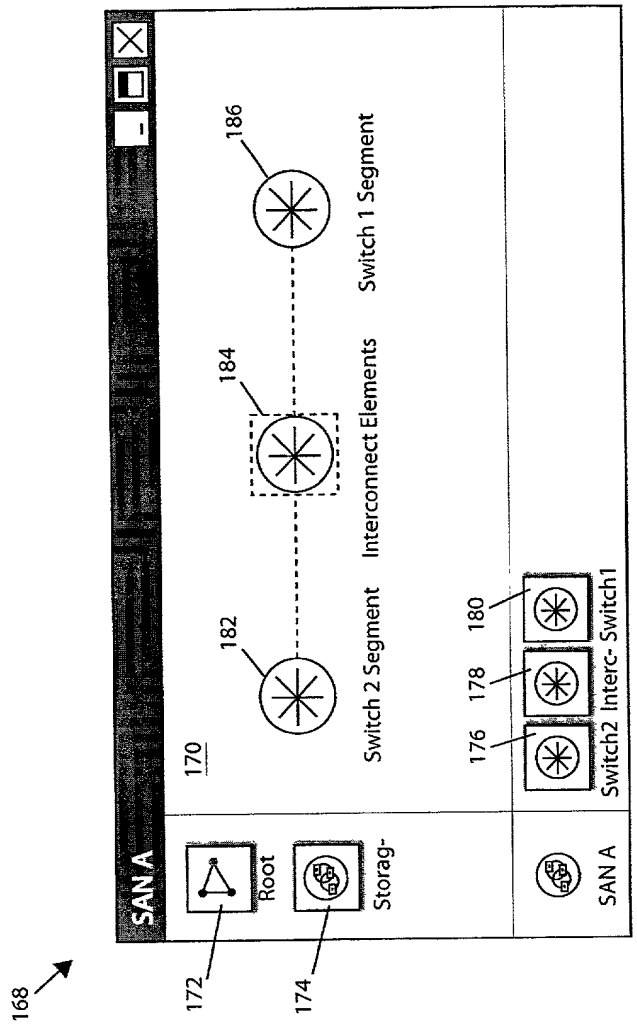
168
SAN A
170
172
Root
174
Storag-
182
184
186
Switch 2 Segment
Interconnect Elements
Switch 1 Segment
176
178
180
SAN A
Switch2 Interc- Switch1

Figure 29

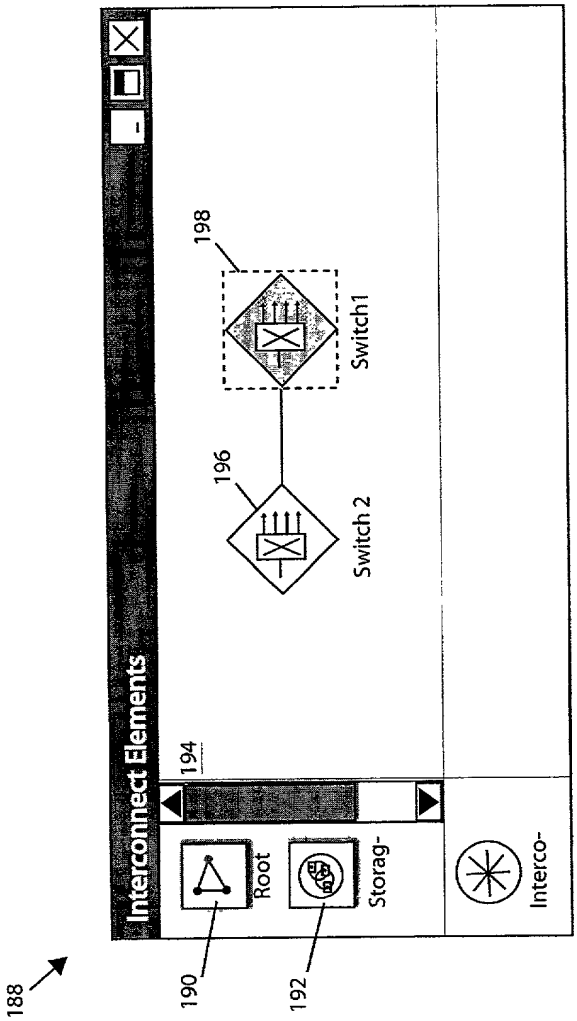
188
Interconnect Elements
194
Root
Storag-
Interco-
190
192
196
Switch 2
198
Switch1

Figure 30

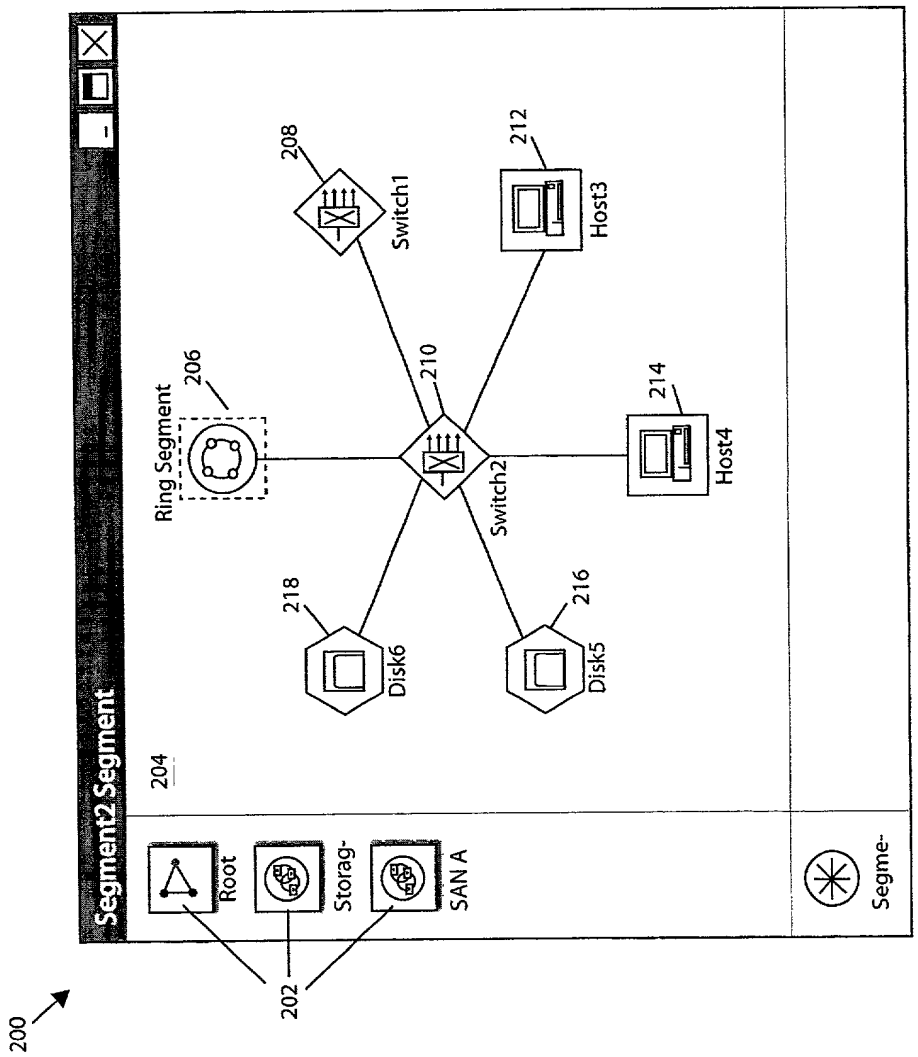
200
202
Segment2 Segment
204
Root
Storag-
SAN A
Segme-
Ring Segment
206
208
Switch1
210
Switch2
212
Host3
214
Host4
216
Disk5
218
Disk6

Figure 31

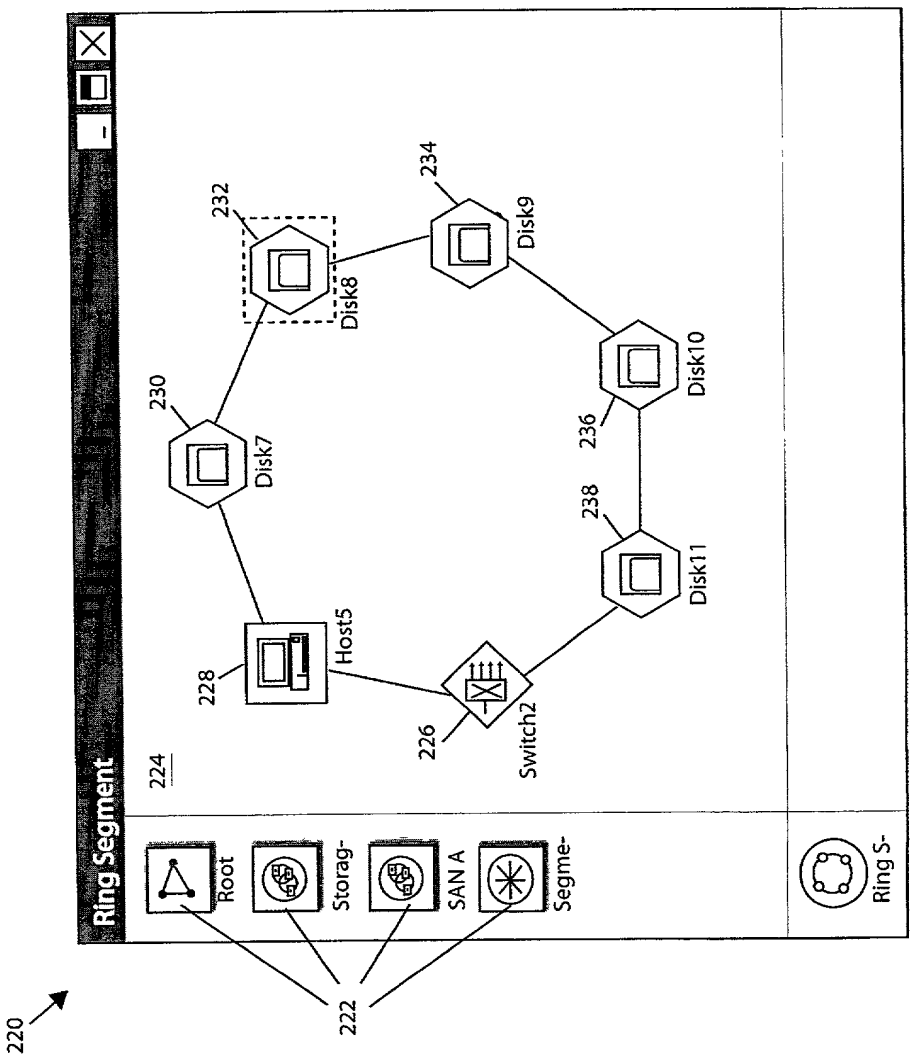
220
222
Ring Segment
224
Root
Storag-
SAN A
Segme-
Ring S-
Host5
228
Switch2
226
Disk7
230
Disk8
232
Disk9
234
Disk10
236
Disk11
238

Figure 32

Figure 33

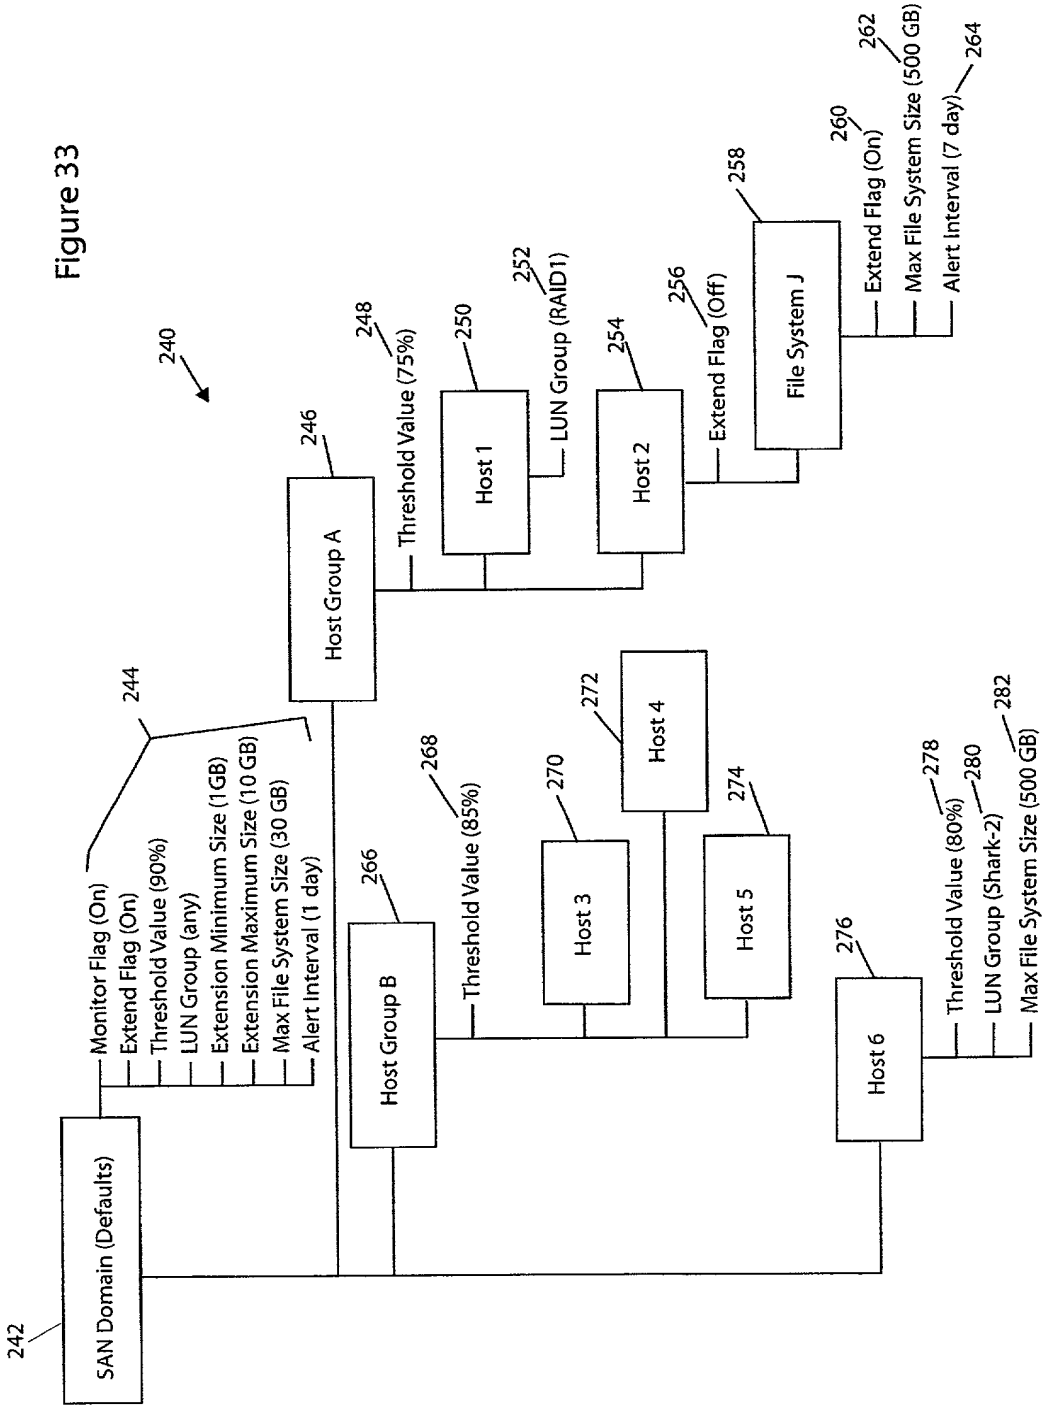
240
242
SAN Domain (Defaults)
244
Monitor Flag (On)
Extend Flag (On)
Threshold Value (90%)
LUN Group (any)
Extension Minimum Size (1GB)
Extension Maximum Size (10 GB)
Max File System Size (30 GB)
Alert Interval (1 day)
246
Host Group A
248
Threshold Value (75%)
250
Host 1
252
LUN Group (RAID1)
254
Host 2
256
Extend Flag (Off)
258
File System J
260
Extend Flag (On)
262
Max File System Size (500 GB)
264
Alert Interval (7 day)
266
Host Group B
268
Threshold Value (85%)
270
Host 3
272
Host 4
274
Host 5
276
Host 6
278
Threshold Value (80%)
280
LUN Group (Shark-2)
282
Max File System Size (500 GB)

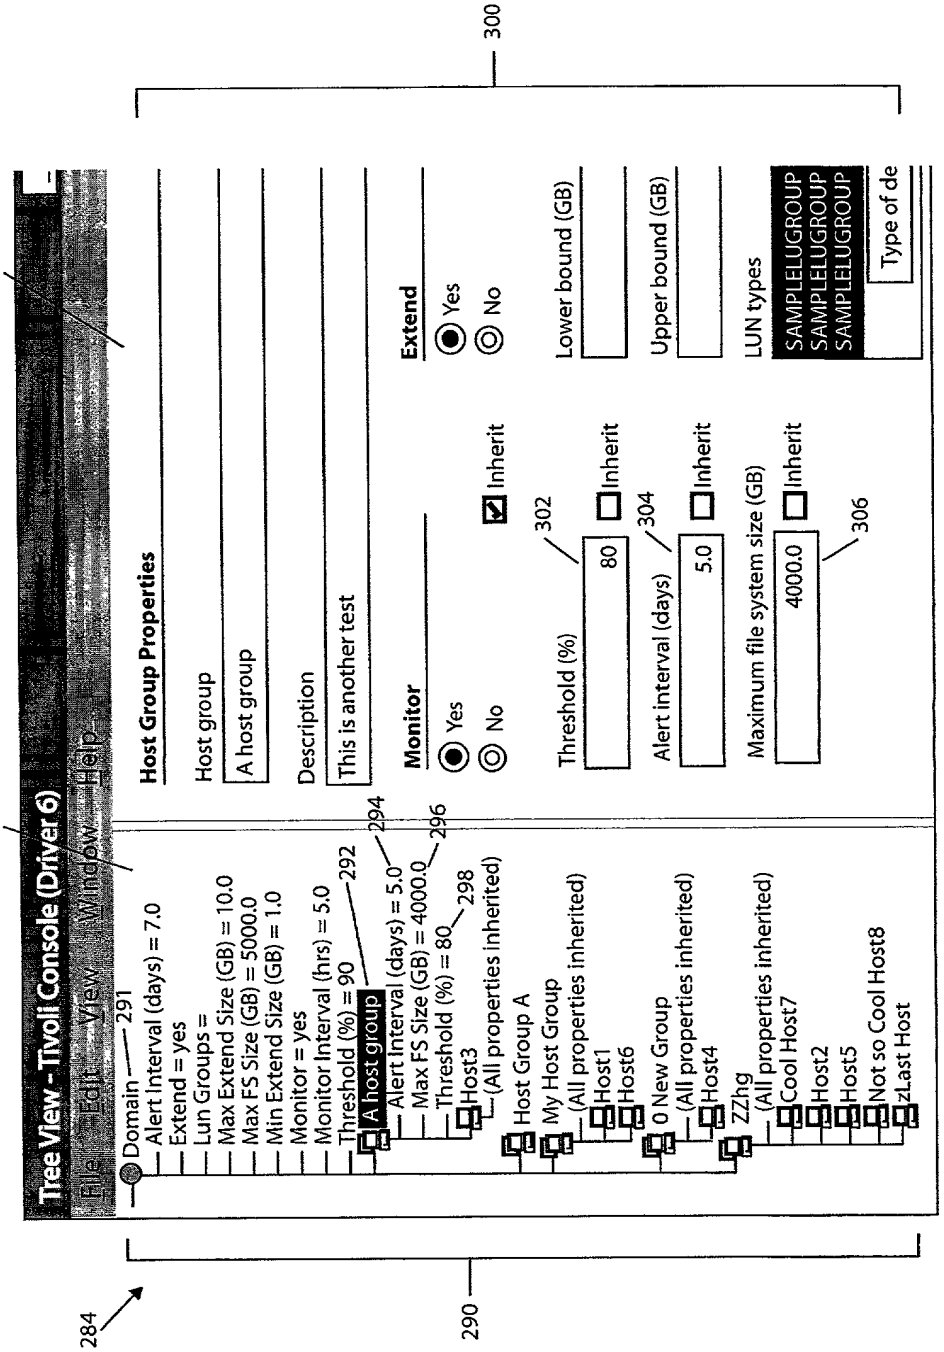
Tree View - Tivoli Console (Driver 6)
File Edit View Window Help
Domain
Alert Interval (days) = 7.0
Extend = yes
Lun Groups =
Max Extend Size (GB) = 10.0
Max FS Size (GB) = 5000.0
Min Extend Size (GB) = 1.0
Monitor = yes
Monitor Interval (hrs) = 5.0
Threshold (%) = 90
A host group
Alert Interval (days) = 5.0
Max FS Size (GB) = 4000.0
Threshold (%) = 80
Host3
(All properties inherited)
Host Group A
My Host Group
(All properties inherited)
Host1
Host6
0 New Group
(All properties inherited)
Host4
ZZhg
(All properties inherited)
Cool Host7
Host2
Host5
Not so Cool Host8
zLast Host
Host Group Properties
Host group
A host group
Description
This is another test
Monitor
Yes
No
Inherit
Extend
Yes
No
Threshold (%)
80
Inherit
Lower bound (GB)
Alert interval (days)
5.0
Inherit
Upper bound (GB)
Maximum file system size (GB)
4000.0
Inherit
LUN types
SAMPLELUGROUP
SAMPLELUGROUP
SAMPLELUGROUP
Type of de
284
286
288
290
291
292
294
296
298
300
302
304
306

Figure 34

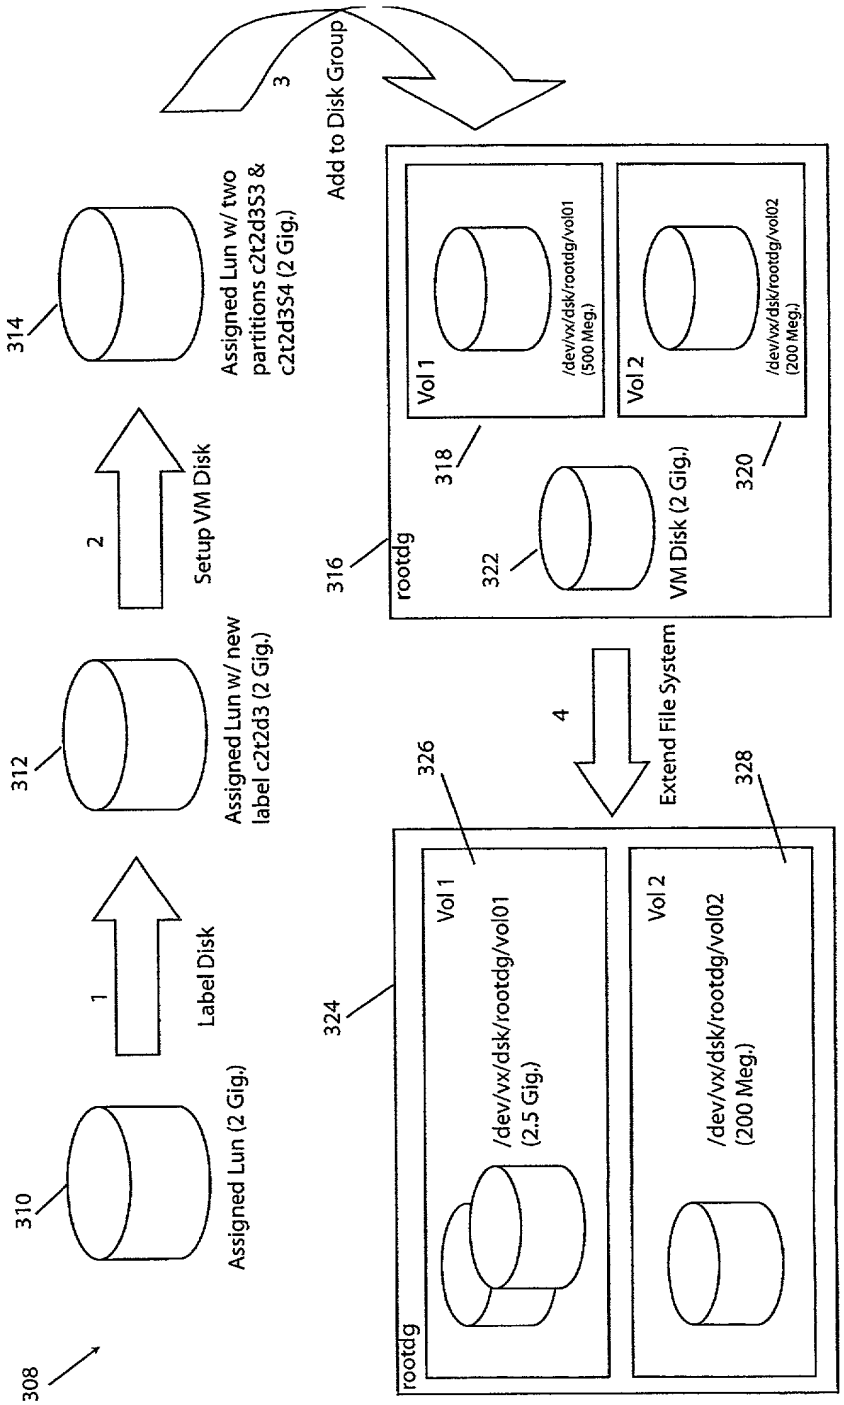
308
310
Assigned Lun (2 Gig.)
1
Label Disk
312
Assigned Lun w/ new label c2t2d3 (2 Gig.)
2
Setup VM Disk
314
Assigned Lun w/ two partitions c2t2d3S3 & c2t2d3S4 (2 Gig.)
3
Add to Disk Group
316
rootdg
318
Vol 1
/dev/vx/dsk/rootdg/vol01 (500 Meg.)
320
Vol 2
/dev/vx/dsk/rootdg/vol02 (200 Meg.)
322
VM Disk (2 Gig.)
4
Extend File System
324
rootdg
326
Vol 1
/dev/vx/dsk/rootdg/vol01 (2.5 Gig.)
328
Vol 2
/dev/vx/dsk/rootdg/vol02 (200 Meg.)

Figure 35

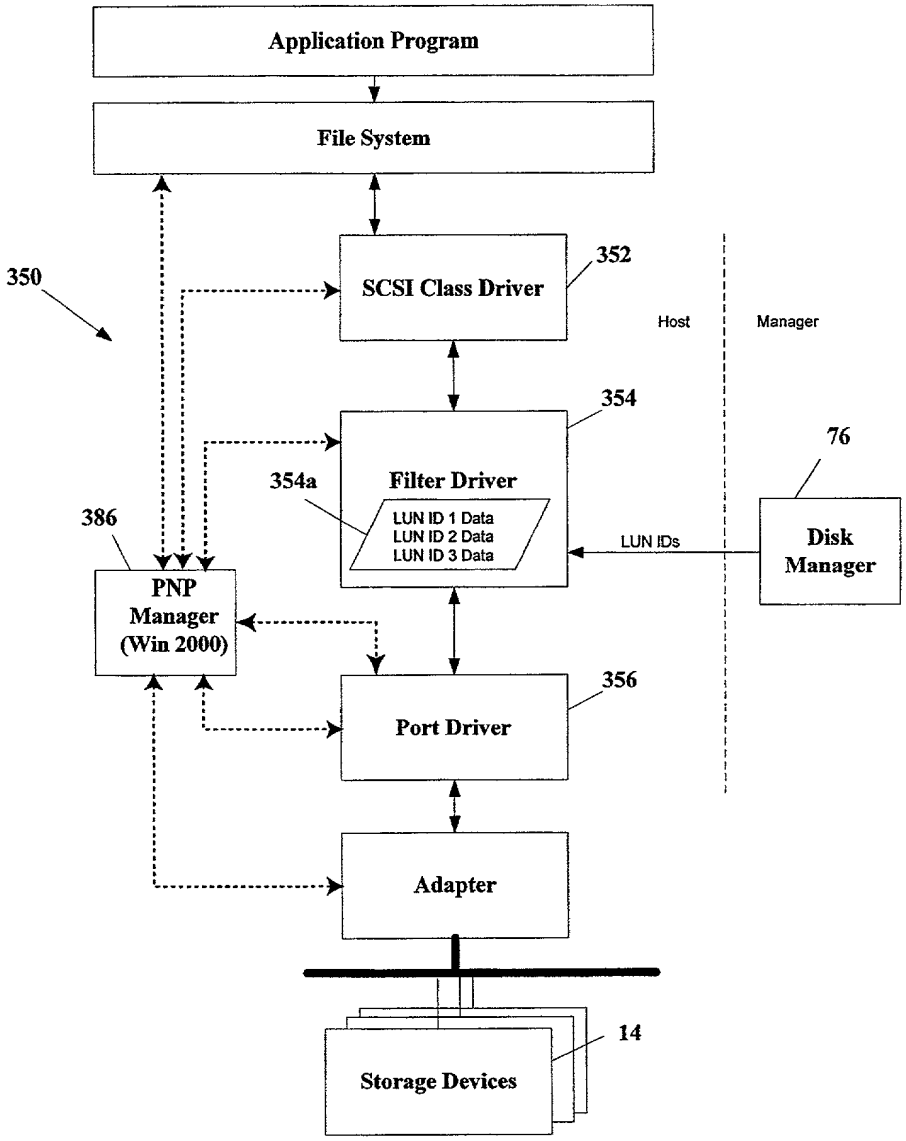
Application Program
File System
SCSI Class Driver
352
350
Host
Manager
354
Filter Driver
354a
LUN ID 1 Data
LUN ID 2 Data
LUN ID 3 Data
76
386
LUN IDs
Disk Manager
PNP Manager (Win 2000)
356
Port Driver
Adapter
14
Storage Devices

FIGURE 36

Figure 37

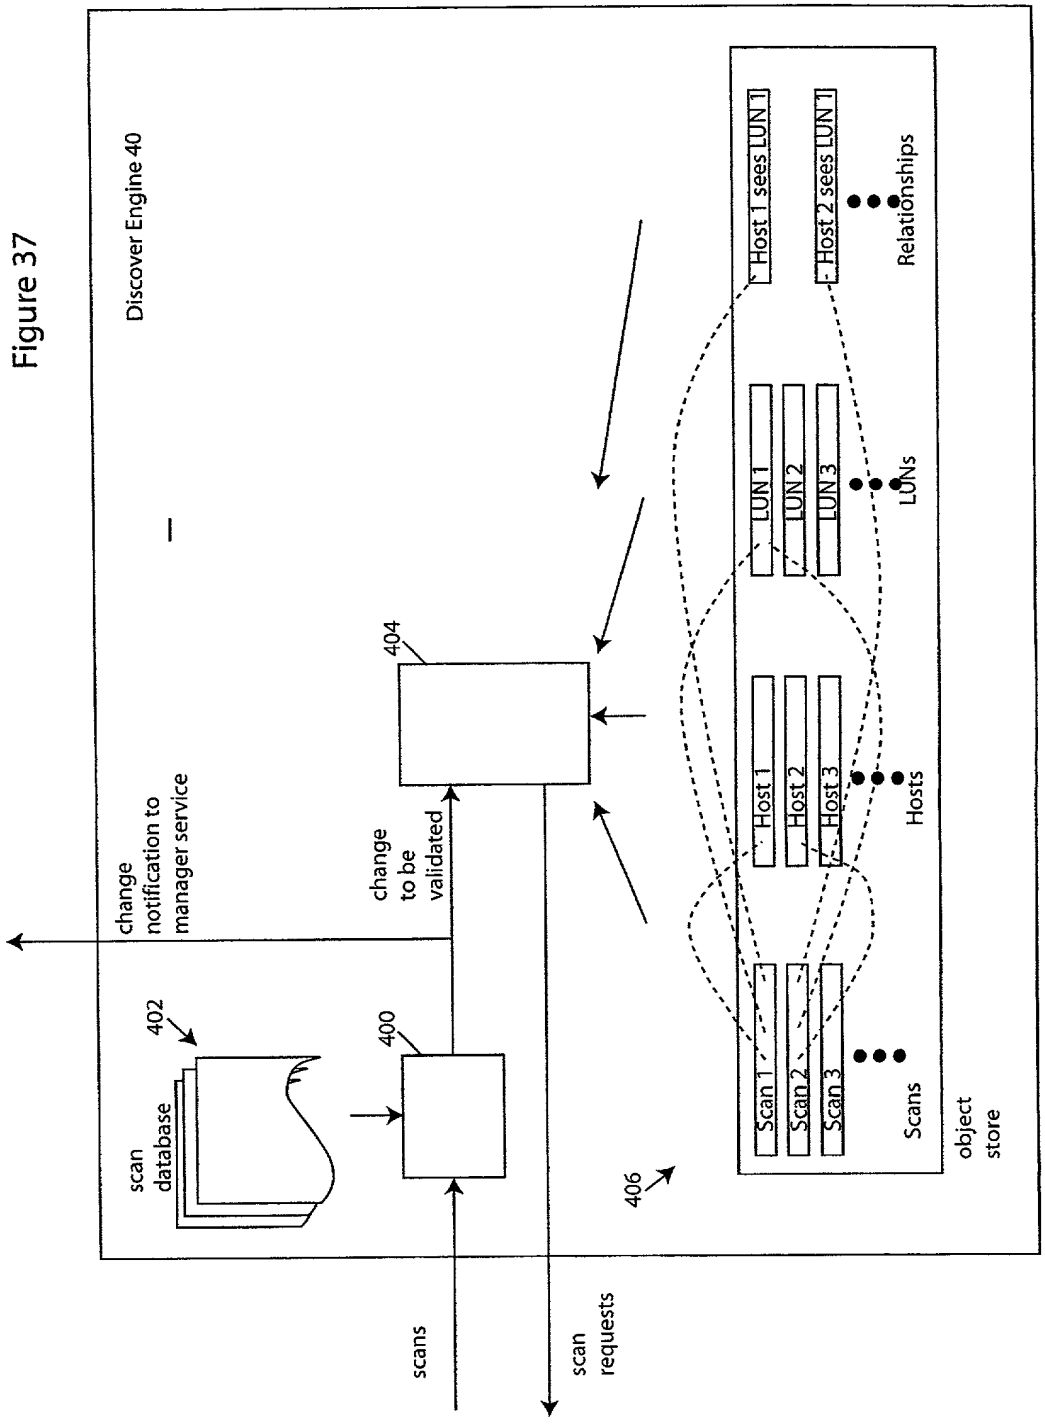
Discover Engine 40
change notification to manager service
change to be validated
scan database
402
400
404
406
scans
scan requests
Host 1 sees LUN 1
Host 2 sees LUN 1
Relationships
LUN 1
LUN 2
LUN 3
LUNs
Host 1
Host 2
Host 3
Hosts
Scan 1
Scan 2
Scan 3
Scans
object store

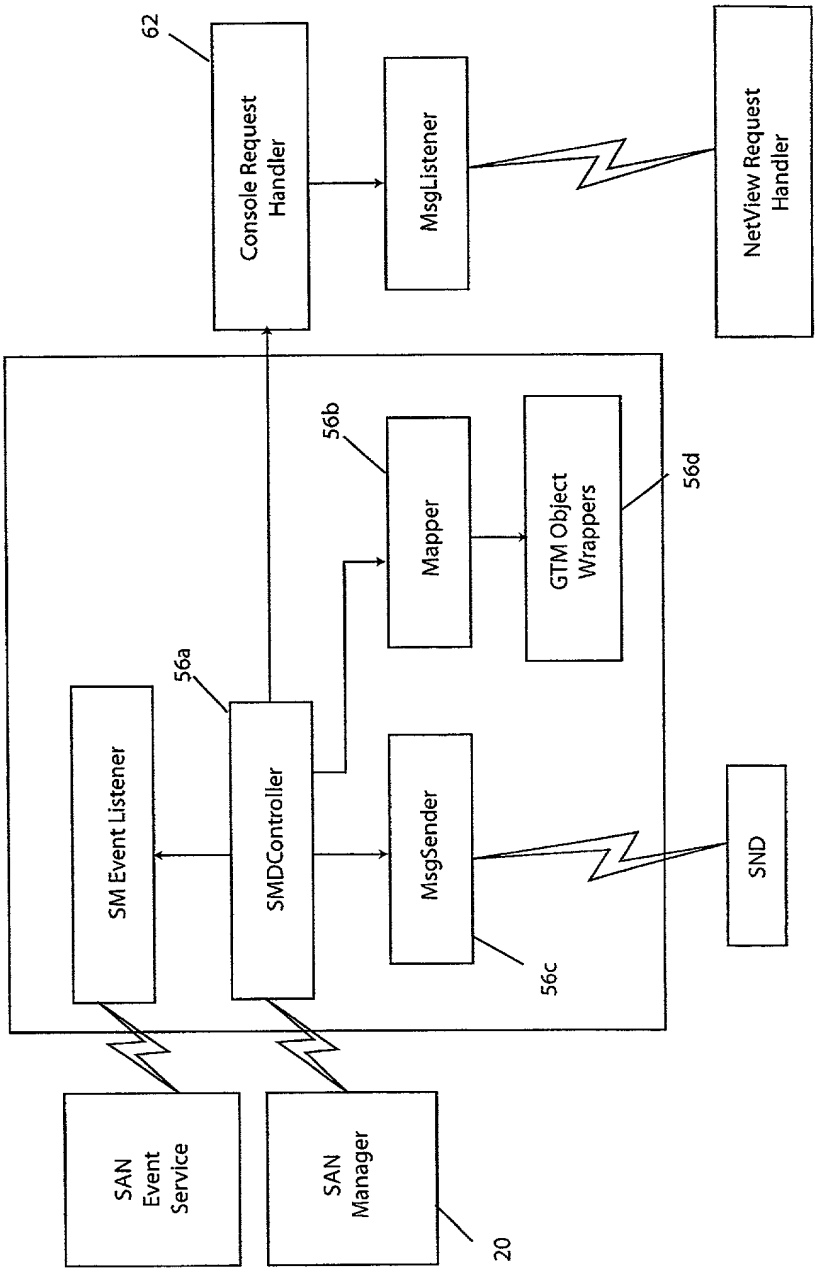
62
Console Request Handler
MsgListener
NetView Request Handler
56b
Mapper
GTM Object Wrappers
56d
56a
SM Event Listener
SMDController
MsgSender
SND
56c
SAN Event Service
SAN Manager
20

Figure 38

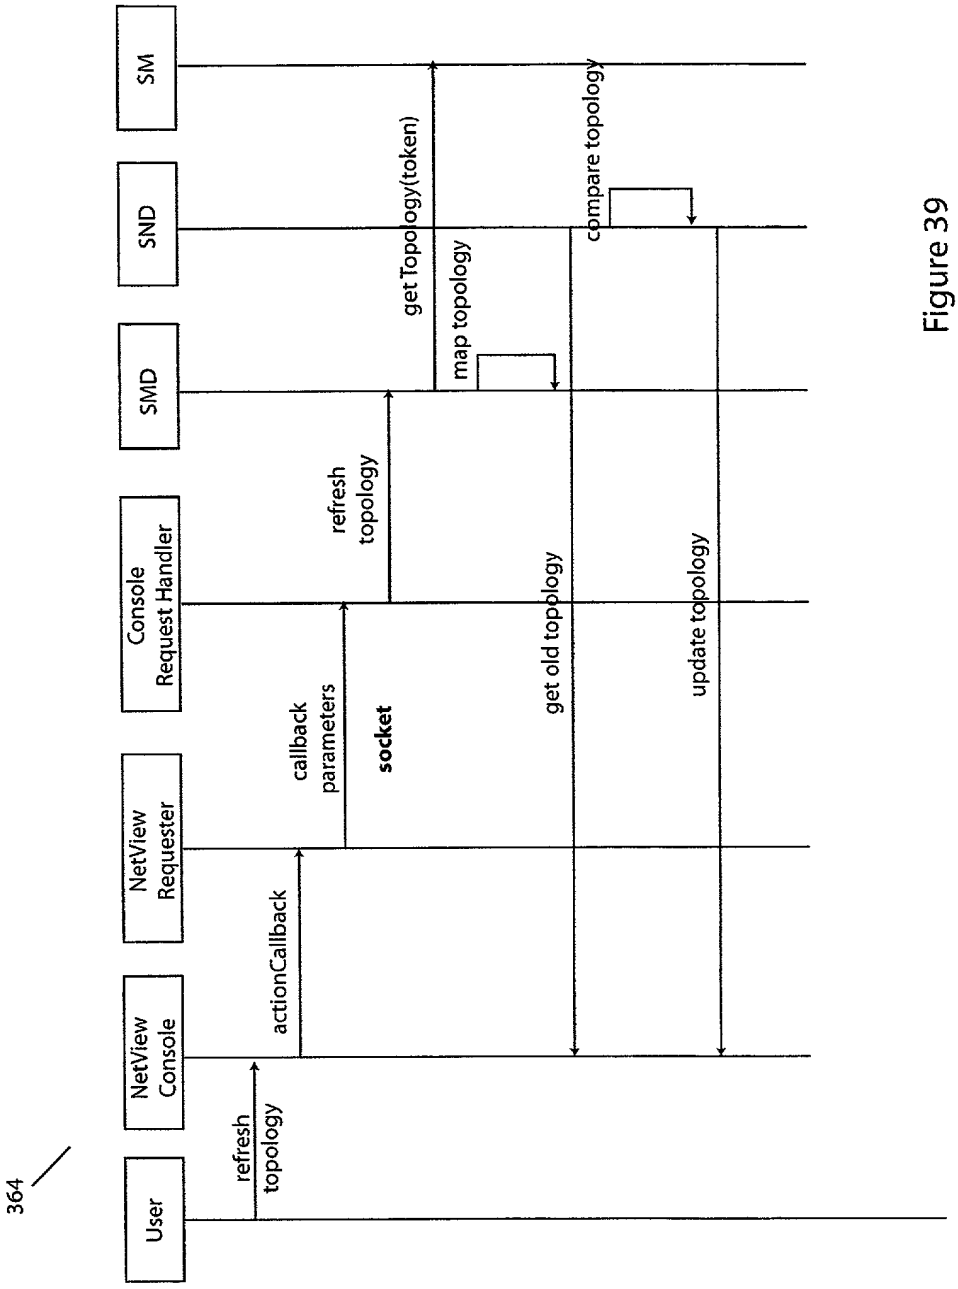
364
User
NetView Console
NetView Requester
Console Request Handler
SMD
SND
SM
refresh topology
actionCallback
callback parameters
socket
refresh topology
get Topology(token)
map topology
get old topology
compare topology
update topology

Figure 39

Figure 40

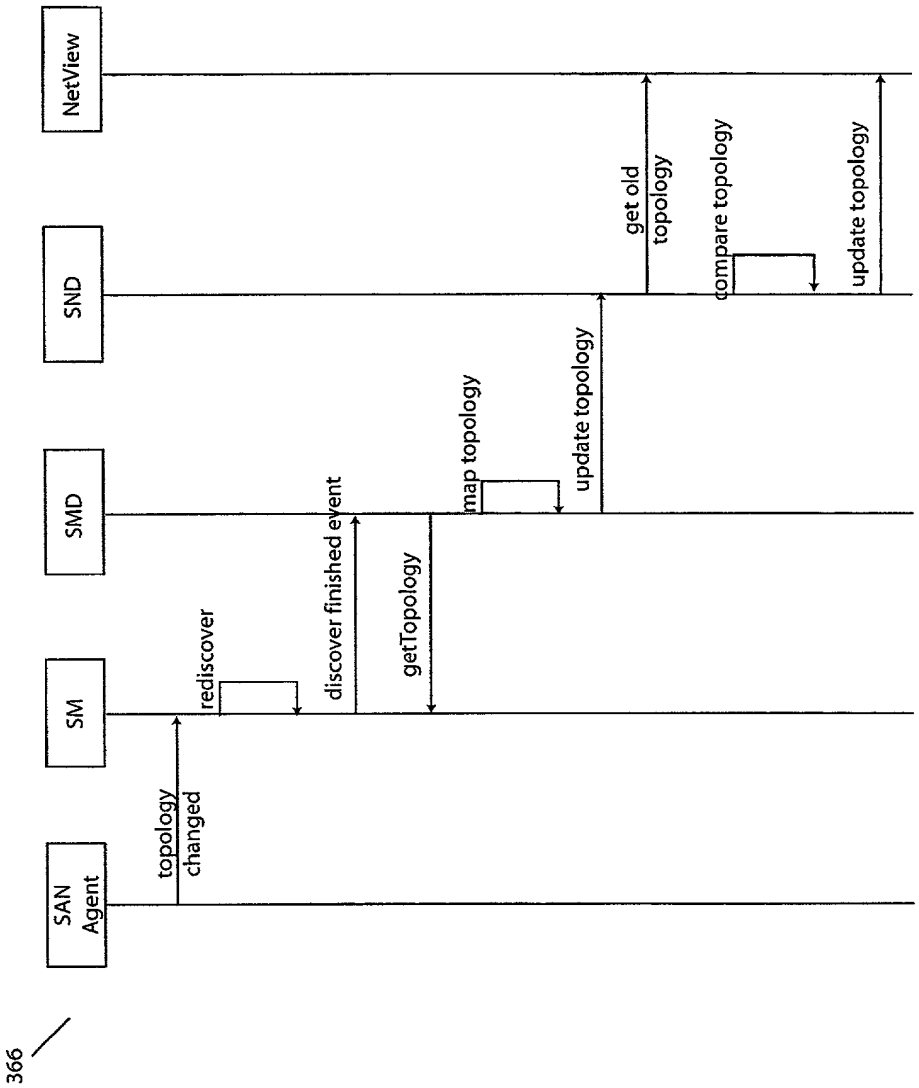
366
SAN Agent
SM
SMD
SND
NetView
topology changed
rediscover
discover finished event
getTopology
map topology
update topology
get old topology
compare topology
update topology

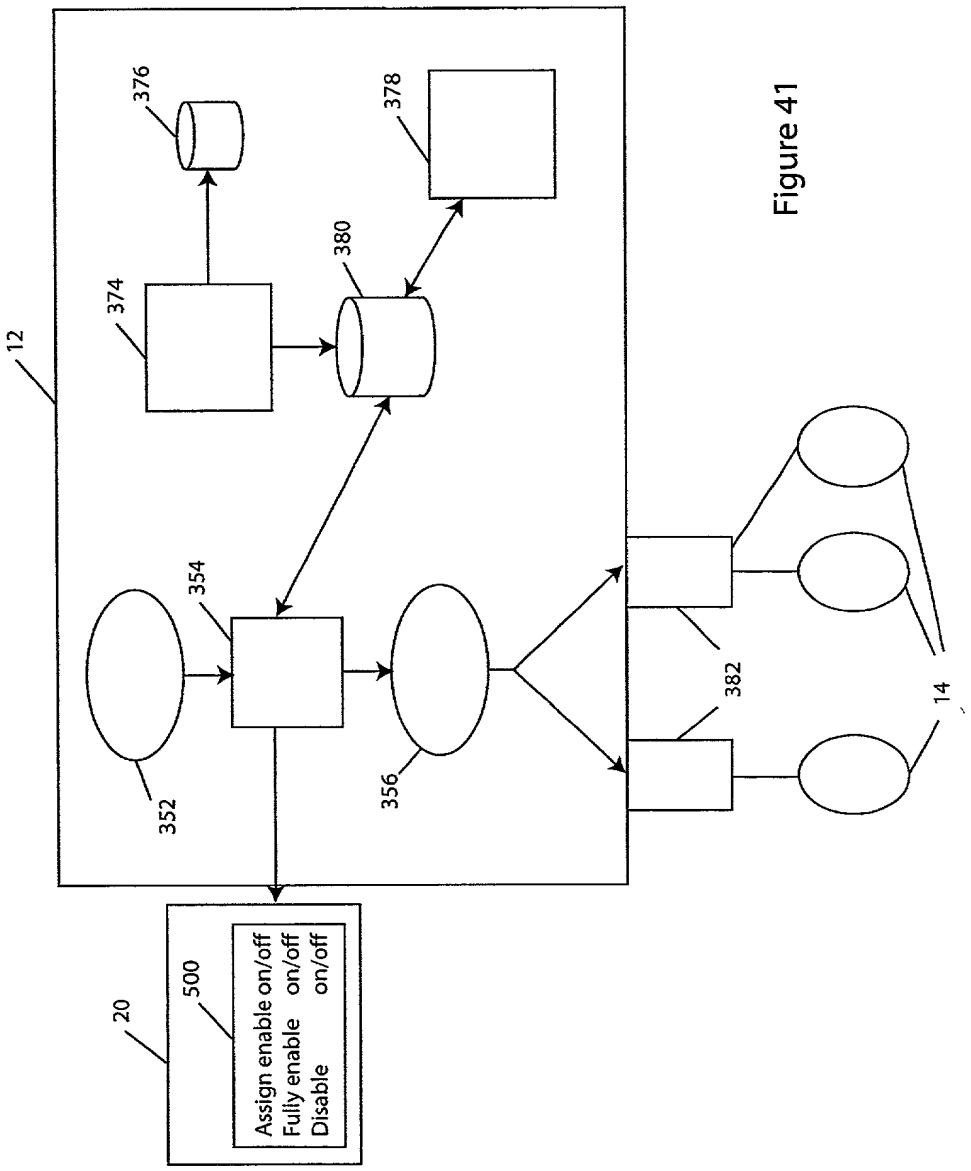
12
376
378
380
374
354
352
356
382
14
20
500
Assign enable on/off
Fully enable on/off
Disable on/off

Figure 41

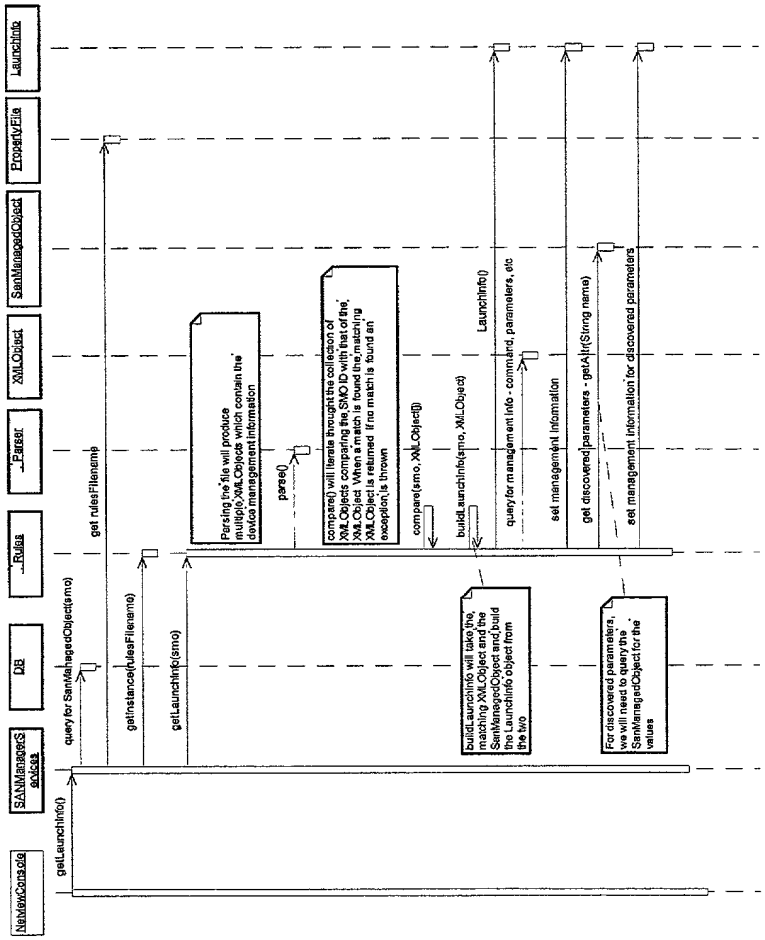
NetViewConsole
SANManagerS device
DB
_Rules
_Parser
XMLObject
SanManagedObject
PropertyFile
LaunchInfo
getLaunchInfo()
query for SanManagedObject(smo)
getInstance(rulesFilename)
get rulesFilename
getLaunchInfo(smo)
Parsing the file will produce multiple XMLObjects which contain the device management information
parse()
compare() will iterate through the collection of XMLObjects comparing the SMOID with that of the XMLObject. When a match is found the matching XMLObject is returned. If no match is found an exception is thrown
compare(smo, XMLObject)
buildLaunchInfo(smo, XMLObject)
LaunchInfo()
query for management info - command, parameters, etc
set management information
get discovered parameters - getAttr(String name)
set management information for discovered parameters
buildLaunchInfo will take the matching XMLObject and the SanManagedObject and build the LaunchInfo object from the two
For discovered parameters, we will need to query the SanManagedObject for the values

Figure 42

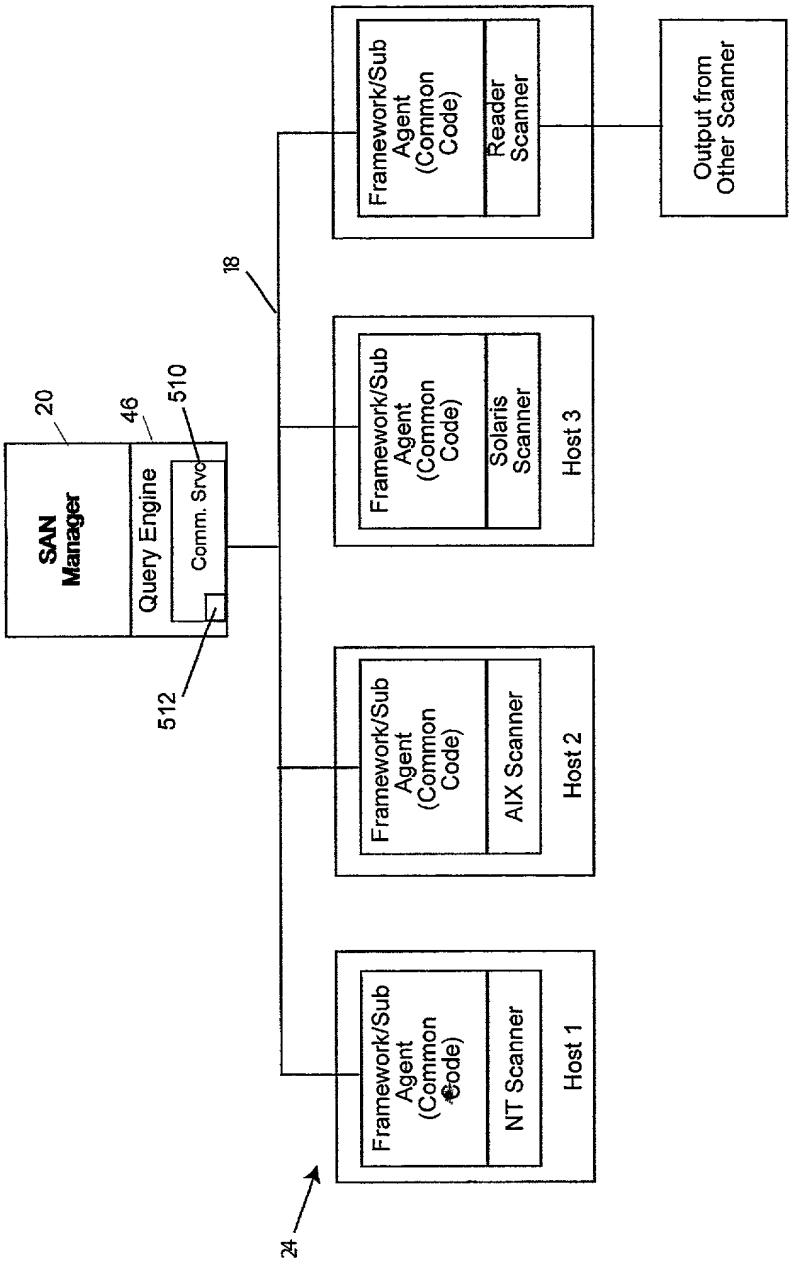
SAN Manager
Query Engine
Comm. Srvc
20
46
510
512
18
24
Framework/Sub Agent (Common Code)
NT Scanner
Host 1
Framework/Sub Agent (Common Code)
AIX Scanner
Host 2
Framework/Sub Agent (Common Code)
Solaris Scanner
Host 3
Framework/Sub Agent (Common Code)
Reader Scanner
Output from Other Scanner

Figure 43